

CITY OF BOULDER
WILDLAND URBAN INTERFACE
COMMUNITY WILDFIRE PROTECTION PLAN



Prepared for:
City of Boulder
Boulder, Colorado
Submitted By:
Anchor Point
Boulder, Colorado
September 2007



TABLE OF CONTENTS

SUMMARY OF THIS DOCUMENT	1
THE NATIONAL FIRE PLAN	1
PURPOSE	2
GOALS AND OBJECTIVES	3
OTHER DESIRED OUTCOMES	3
COLLABORATION: COMMUNITY/AGENCY/STAKEHOLDERS	4
STUDY AREA OVERVIEW	5
WILDLAND URBAN INTERFACE (WUI) INDIVIDUAL STRUCTURE SURVEY ANALYSIS	6
VALUES AT RISK	10
LIFE SAFETY AND HOMES	10
COMMERCE AND INFRASTRUCTURE	10
RECREATION AND LIFESTYLE	11
HABITAT EFFECTIVENESS & ENVIRONMENTAL RESOURCES	11
CURRENT RISK SITUATION	13
FIRE REGIME CONDITION CLASS	17
FIRE BEHAVIOR POTENTIAL	20
SOLUTIONS AND MITIGATIONS	27
ESTABLISHING AND PRIORITIZING FIRE MANAGEMENT UNITS (FMUs)	27
SAFETY ZONES, ADDRESSING, ACCESS, AND EVACUATION ROUTES FMU	28
SAFETY ZONES	28
ADDRESSING	29
PROPOSED EMERGENCY ACCESS TRAIL	30
EVACUATION ROUTES	32
PUBLIC EDUCATION FMU	35
LOCAL PREPAREDNESS AND FIREFIGHTING CAPABILITIES FMU	36
HOME MITIGATION FMU	38
PLAINS COMMUNITIES FMU	43
FUELS MODIFICATION PROJECTS FMU	45
INTRODUCTION	45
CURRENT AND PROPOSED CROSS-BOUNDARY PROJECTS	48
PROPOSED FUELS REDUCTION PROJECTS FOR THE CITY OF BOULDER	50
WATER SUPPLY FMU	52
GLOSSARY	55

TABLE OF FIGURES

FIGURE 1. Typical Area.....	5
FIGURE 2. Roof Type (2004)	6
FIGURE 3. City of Boulder Community Hazard Rating Map.....	7
FIGURE 4. City of Boulder Slopes	8
FIGURE 5. City of Boulder Elevations	9
FIGURE 6. USFS Fire Statistics (Boulder Ranger District).....	15
FIGURE 7. USFS Fire History Data Extent	16
FIGURE 8. Fire Regime/Condition Class	18
FIGURE 9. Flame Length, Moderate Conditions.....	21
FIGURE 10. Rate of Spread, Moderate Conditions	22
FIGURE 11. Crown Fire Potential, Moderate Conditions.....	23
FIGURE 12. Flame Length, Extreme Conditions.....	24
FIGURE 13. Rate of Spread, Extreme Conditions	25
FIGURE 14. Crown Fire Potential, Extreme Conditions	26
FIGURE 15. Safety Zone Guidelines.....	28
FIGURE 16.....	29
FIGURE 17.....	30
FIGURE 18. Evacuation Routes.....	32
FIGURE 19. Saddle & Ridge Top Development.....	38
FIGURE 20. Defensible Space Zones	39
FIGURE 21. City of Boulder Hazard Ratings by Community.....	41
FIGURE 22. Current and Proposed Projects near City of Boulder	49
FIGURE 23. Proposed Fuel Reduction Projects.....	50

INDEX OF TABLES

TABLE 1. CWPP DEVELOPMENT TEAM	4
TABLE 2. STUDY AREA COMMUNITIES.....	7
TABLE 3. CONDITION CLASS DESCRIPTIONS	19
TABLE 4. CITY OF BOULDER HAZARD RATINGS BY COMMUNITY.....	42
TABLE 5. RECOMMENDED TREATMENT DISTANCES FOR MID-SLOPE ROADS.....	47

SUMMARY OF THIS DOCUMENT

This document incorporates new and existing information relating to wildfire, and has been prepared for citizens, policy makers, and public agencies within the City of Boulder (COB) response area, Boulder, CO. Wildfire hazard data is derived from the community wildfire hazard rating analysis (WHR) and the analysis of fire behavior potential, which are extensive and/or technical in nature. As a result, detailed findings and methodologies are included in their entirety in appendices rather than the main report text. This approach is designed to make the plan more readable while establishing a reference source for those interested in the technical elements of the City of Boulder wildfire hazard and risk assessment.

The City of Boulder Community Wildfire Protection Plan (CWPP) is the result of a community-wide fire protection planning effort that includes extensive field data gathering, compilation of existing fire suppression documents, a scientific analysis of the fire behavior potential of the study area, and collaboration with various participants: homeowners, City of Boulder officials, and the Colorado State Forest Service (CSFS). This project meets the requirements of the federal Healthy Forests Restoration Act (HFRA) of 2003 for community fire planning.

The CWPP meets the requirements of HFRA by:

- 1. Identifying and prioritizing fuels reduction opportunities across the landscape**
See section *Fuels Modification FMU* on pages 45-51 of this document.
- 2. Addressing structural ignitability**
See pages 38-44 and *Appendix B*
- 3. Collaborating with stakeholders**
See Appendix E

THE NATIONAL FIRE PLAN

In 2000, more than eight million acres burned across the United States, marking one of the most devastating wildfire seasons in American history. One high-profile incident, the Cerro Grande fire at Los Alamos, NM, destroyed more than 235 structures and threatened the Department of Energy's nuclear research facility.

Two reports addressing federal wildland fire management were initiated after the 2000 fire season. The first was a document prepared by a federal interagency group entitled "Review and Update of the 1995 Federal Wildland Fire Management Policy" (2001), which concluded among other points that the condition of America's forests had continued to deteriorate.

The second report issued by the Bureau of Land Management (BLM) and the United States Department of Agriculture Forest—Service (USFS) "Managing the Impacts of Wildfire on Communities and the Environment: A Report to the President in Response to the Wildfires of

2000”—would become known as the National Fire Plan (NFP). That report, and the ensuing congressional appropriations, ultimately required actions to:

1. Respond to severe fires
2. Reduce the impact of fire on rural communities and the environment
3. Ensure sufficient firefighting resources

Congress increased its specific appropriations to accomplish these goals. But 2002 was another severe season, with more than 1,200 homes destroyed and seven million acres burned. In response to public pressure, Congress and the Bush administration continued to obligate funds for specific actionable items, such as preparedness and suppression. That same year, the Bush administration announced the HFRA initiative, which enhanced measures to restore forest and rangeland health and reduce the risk of catastrophic wildfires. In 2003, that act was signed into law.

Through these watershed pieces of legislation, Congress continues to appropriate specific funding to address five main sub-categories: preparedness, suppression, reduction of hazardous fuels, burned-area rehabilitation, and state and local assistance to firefighters. The general concepts of the NFP blended well with the established need for community wildfire protection in the study area. The spirit of the NFP is reflected in the COB CWPP.

PURPOSE

The purpose of the risk analysis, fire behavior analysis, community wildfire hazard rating (WHR) and the resulting CWPP is to provide a comprehensive, scientifically-based assessment of the wildfire hazards and risks within the COB.

The assessment estimates the risks and hazards associated with wildland fire in proximity to communities. This information, in conjunction with Values at Risk, defines “areas of concern” for the community and allows for prioritization of mitigation efforts. From these analyses, solutions and mitigation recommendations are offered that will aid homeowners, land managers and other interested parties in developing short-term and long-term fuels and fire management plans. For the purposes of this report the following definitions apply:

Risk is considered to be the likelihood of an ignition occurrence. This is primarily determined by the fire history of the area.

Hazard is the combination of the WHR ratings of the WUI communities and the analysis of fire behavior potential, as modeled from the fuels, weather and topography of the study area. Hazard attempts to quantify the severity of undesirable fire outcomes to the Values at Risk.

Values at Risk are the human and intrinsic values identified as important to the way of life of the study area by its inhabitants, such as life safety, property conservation, access to recreation and wildlife habitat. (See pages 9-11 for a comprehensive overview.)

GOALS AND OBJECTIVES

Goals for this project include the following:

1. Enhance Life Safety for Residents and Responders
2. Mitigate Undesirable Fire Outcomes to Property and Infrastructure
3. Mitigate Undesirable Fire Outcomes to the Environment and Quality of Life

In order to accomplish these goals the following objectives have been identified:

1. Establish an approximate level of risk (the likelihood of a significant wildfire event for the study area)
2. Provide a scientific analysis of the fire behavior potential of the study area
3. Group Values at Risk into "communities" that represent relatively similar hazard factors
4. Identify and quantify factors that limit (mitigate) undesirable fire effects to the Values at Risk (hazard levels)
5. Recommend specific actions that will reduce hazards to the Values at Risk

OTHER DESIRED OUTCOMES

1. Promote community awareness:

Quantification of the community's hazards and risk from wildfire will facilitate public awareness and assist in creating public action to mitigate the defined hazards.

2. Improve wildfire prevention through education:

Awareness, combined with education, will help to reduce the risk of unplanned human ignitions.

3. Facilitate and prioritize appropriate hazardous fuel reduction:

Organizing and prioritizing hazard mitigation actions into Fire Management Units (FMU) can assist stakeholders in focusing future efforts from both a social and fire management perspective.

4. Promote improved levels of response:

The identification of areas of concern will improve the accuracy of pre-planning, and facilitate the implementation of cross-boundary, multi-jurisdictional projects.

COLLABORATION: COMMUNITY/AGENCY/STAKEHOLDERS

Representatives involved in the development of the City of Boulder CWPP are included in the following table. Their names, organization, and roles and responsibilities are indicated in Table 1. For more information on the collaborative process that led to the development of this CWPP, see **Appendix E, City of Boulder CWPP Collaborative Effort**.

TABLE 1. CWPP Development Team

Name	Organization	Roles / Responsibilities
Greg Toll, Wildland Fire Division Chief Dave Zader, Wildland Fire Management Officer	City of Boulder	Local information and expertise, including community risk and value assessment, development of community protection priorities, and establishment of fuels treatment project areas and methods.
Alan Owen, District Forester	Colorado State Forest Service	Facilitation of planning process and approval of CWPP minimum standards.
Rodrigo Moraga, Managing Member, Fire Behavior Analyst Christopher White, CEO, Urban Interface Specialist Mark McLean, GIS Project Manager Quinn MacLeod, WUI Project Specialist	Anchor Point Group LLC Consultants	Development of the CWPP, decision-making, community risk and value assessment, development of community protection priorities, establishment of fuels treatment project areas and methods.

STUDY AREA OVERVIEW

The City of Boulder is located in Boulder County, Colorado. The City Of Boulder covers an area of 24 square miles, and has approximately 93,000 residents. City lands are bordered by various other suppression agencies including the Rocky Mountain Fire Protection District, Boulder Rural Fire Protection District, Lefthand Fire Protection District, Four Mile Fire Protection District, Boulder Mountain Fire Protection District, Sunshine Fire Protection District, Sugarloaf Fire Protection District, Hygiene Fire Protection District, Mountain View Fire Protection District, Coal Creek Fire Protection District, Indian Peaks Fire Protection District, Nederland Fire Department, Louisville Fire Department, and the Boulder Ranger District of the USFS.

FIGURE 1. Typical Area



For the purposes of this report, communities have been assessed for the hazards and risks that occur inside the department boundaries. GIS work for this project has been extended to a project boundary beyond the district boundaries. Unless noted otherwise, rankings and descriptions of communities, as well as hazard and risk recommendations, pertain only to the portions of those areas that lie within the boundaries of the City of Boulder.

The fire department service area lies within two distinct areas, the plains and the foothills. The Plains life zone, 3,500 to 5,500 feet, is where the majority of study area population resides. It is dominated by grasslands, tall grass prairie remnants and riparian vegetation (including cattails, cottonwoods and other riparian hardwoods and shrubs) growing along water courses and in drainages. The foothills area is considered to be in the Foothill/Montane life zone (6,000'-10,000') of the eastern slope of the Northern Colorado Front Range.¹ The dominant vegetation is Ponderosa pine (*Pinus ponderosa*) and Douglas fir (*Pseudotsuga menziesii*). The foothills area also contains dense stands of mixed conifers primarily on north facing slopes. There are also dense riparian shrub corridors and open canopy woodlands broken by large grass meadows in this area.

Figure 3 and **Table 2** show the communities that define the WUI study area. For the purposes of this project, the wildland urban interface areas were divided into 10 communities. Each community represents certain dominant hazards from a wildfire perspective. The overall hazard ranking of these communities is determined by considering the following variables: fuels, topography, structural flammability, availability of water for fire suppression, egress and navigational difficulties, as well as other hazards, both natural and manmade. The methodology for this assessment uses the WHR community hazard rating system developed specifically to evaluate communities within the WUI for their relative wildfire hazard.² The WHR model combines physical infrastructure such as structure density and roads, and fire behavior components like fuels and topography, with the field experience and knowledge of wildland fire experts. For more information on the WHR methodology please see **Appendix B**.

¹ Elevation limits for life zones were based on life zone ranges from: Jack Carter, *Trees and Shrubs of Colorado*, Johnson Books, Boulder, CO, 1998.

² C. White, "Community Wildfire Hazard Rating Form," in *Wildfire Hazard Mitigation and Response Plan*, Colorado State Forest Service, Ft. Collins, CO, 1986.

Wildland Urban Interface (WUI) Individual Structure Survey Analysis


History

In 1994 the City of Boulder enacted a roof ordinance which required the use of Class "A" or Class "B" fire rated materials when a structure was re-roofed. The impetus for the roof ordinance was a concern that under the right conditions (Chinook winds from the west) it might be possible to have embers spot on to a wood shake roof and then spread to adjacent roofs and structures.

In May of 2004 a Wildland Urban Interface (WUI) Individual Structure Survey Analysis was conducted. The findings with regards to the type of roofing composition are displayed **below and in FIGURE 2**. Of particular note, is the number of class A & B rated roofs versus the number of wood shake shingle roofs.

- Roof Type
 - 81% (520) Have (class A or B Roof) or other noncombustible roof
 - 19% (120) Have wood shake roof

FIGURE 2. Roof Type (2004)

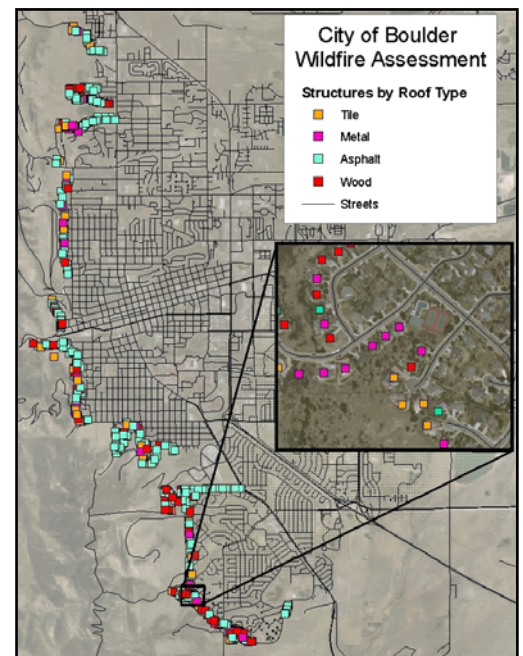

Current Findings

While the individual home assessments from 2004 were not updated as a part of this CWPP, the CWPP field work revealed a further reduction of wood shake shingle roofs within the interface communities. Specifically, there are fewer adjacent homes with wood shake shingle roofs. This suggests yet a further reduction in the probability of structure to structure ignitions due to the composition of the roof.

FIGURE 3. City of Boulder Community Hazard Rating Map

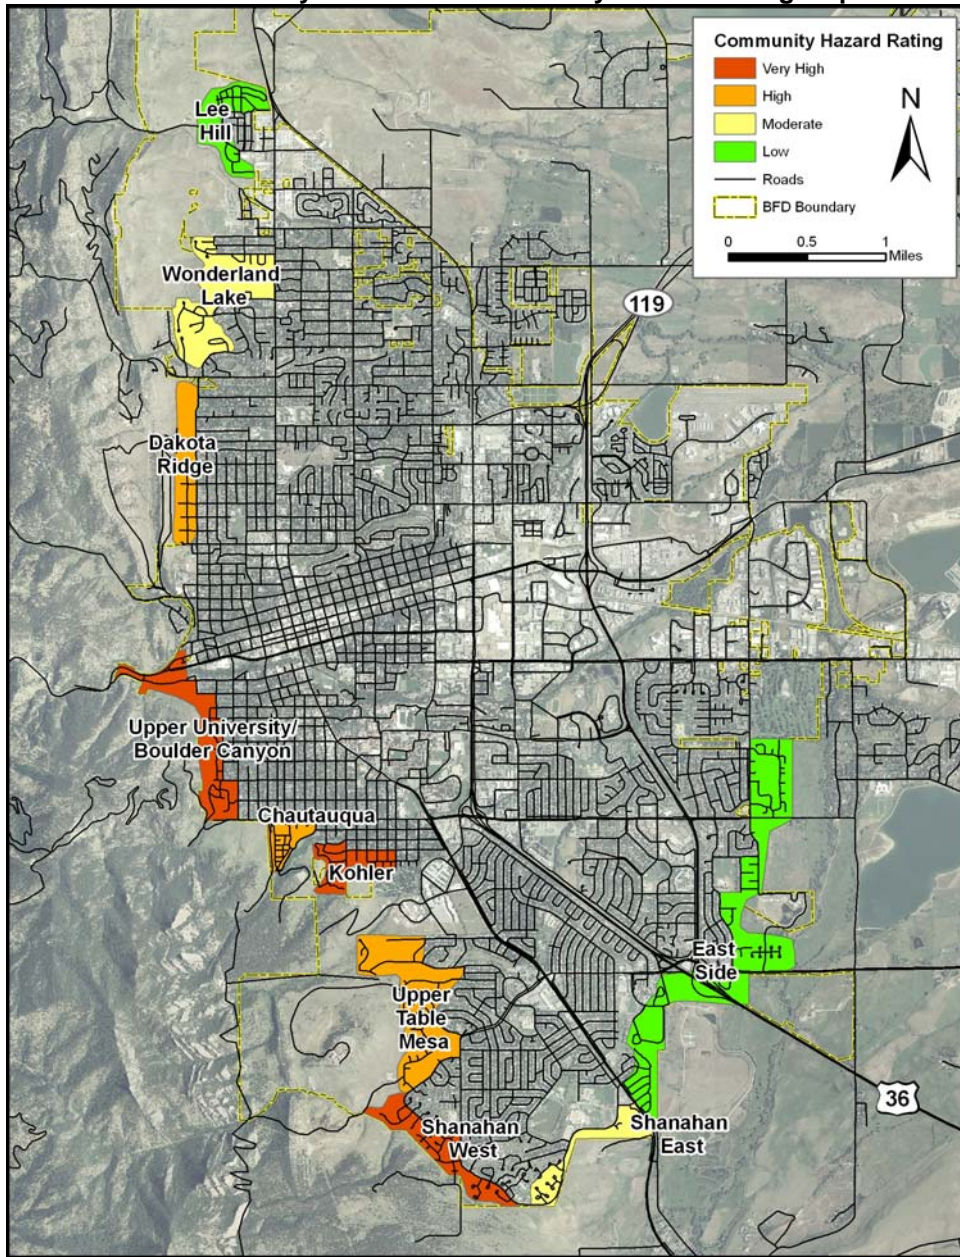


TABLE 2. Study Area Communities

• Kohler Area	6. Dakota Ridge Area
• Upper University / Boulder Canyon Area	7. Wonderland Lake Area
• Shanahan West Area	8. Shanahan East Area
• Chautauqua	9. East Side Area
• Upper Table Mesa Area	10. Lee Hill Area

For reference to the rest of this document, **Figure 4** and **Figure 5** show the general topography of the area. These graphic representations of the landforms of the study area (elevation and slope) will be helpful in interpreting other map products in this report.

FIGURE 4. City of Boulder Slopes


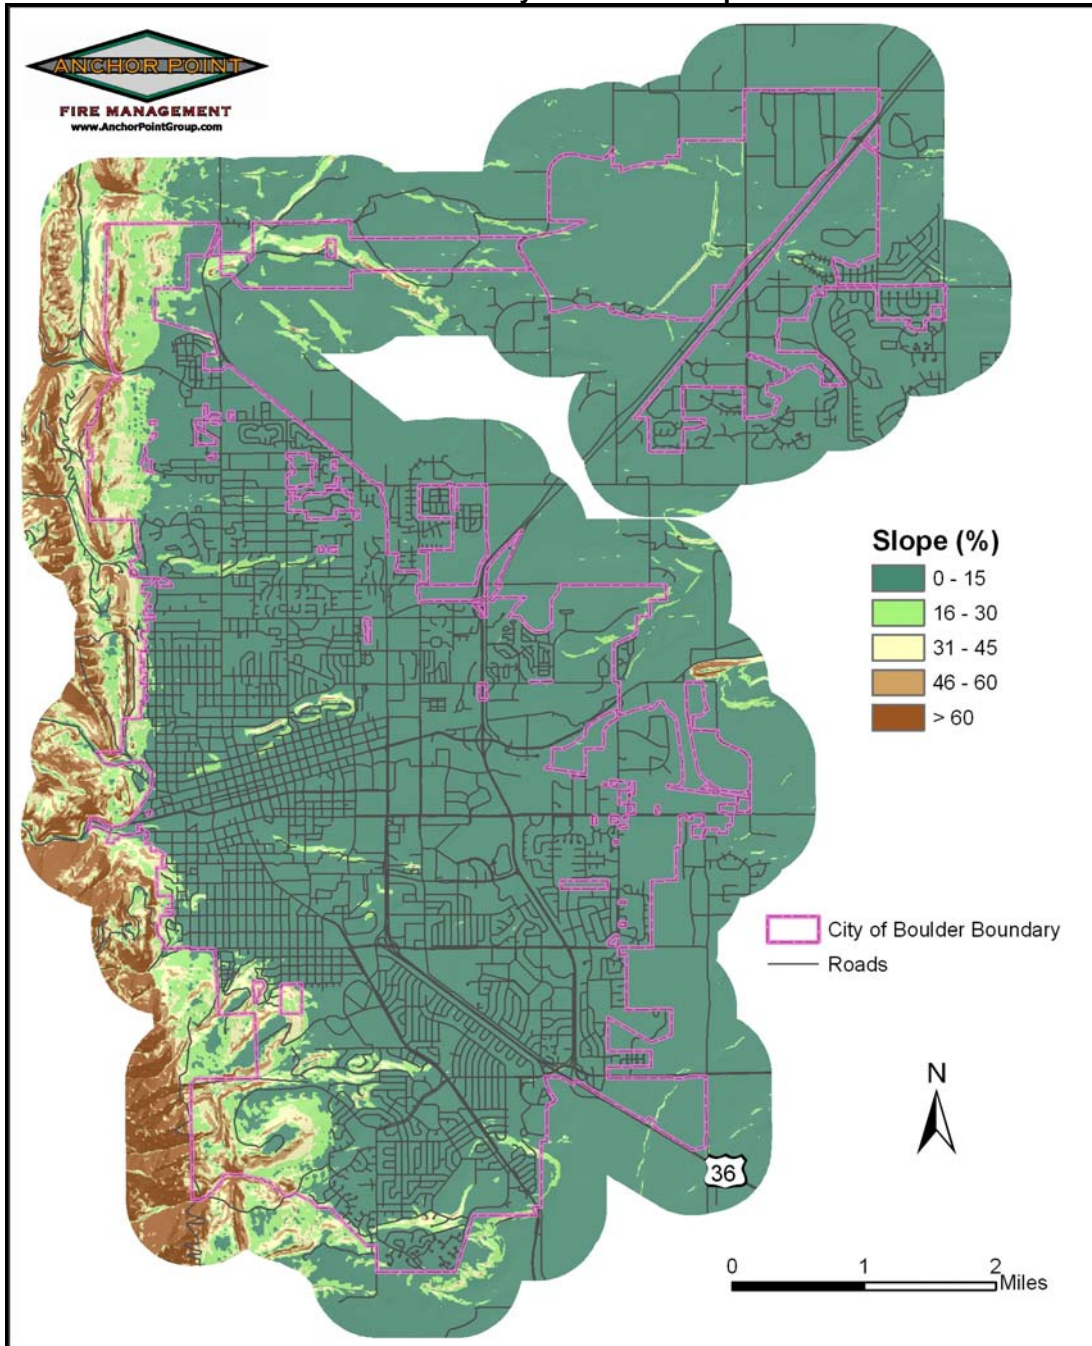


FIGURE 5. City of Boulder Elevations

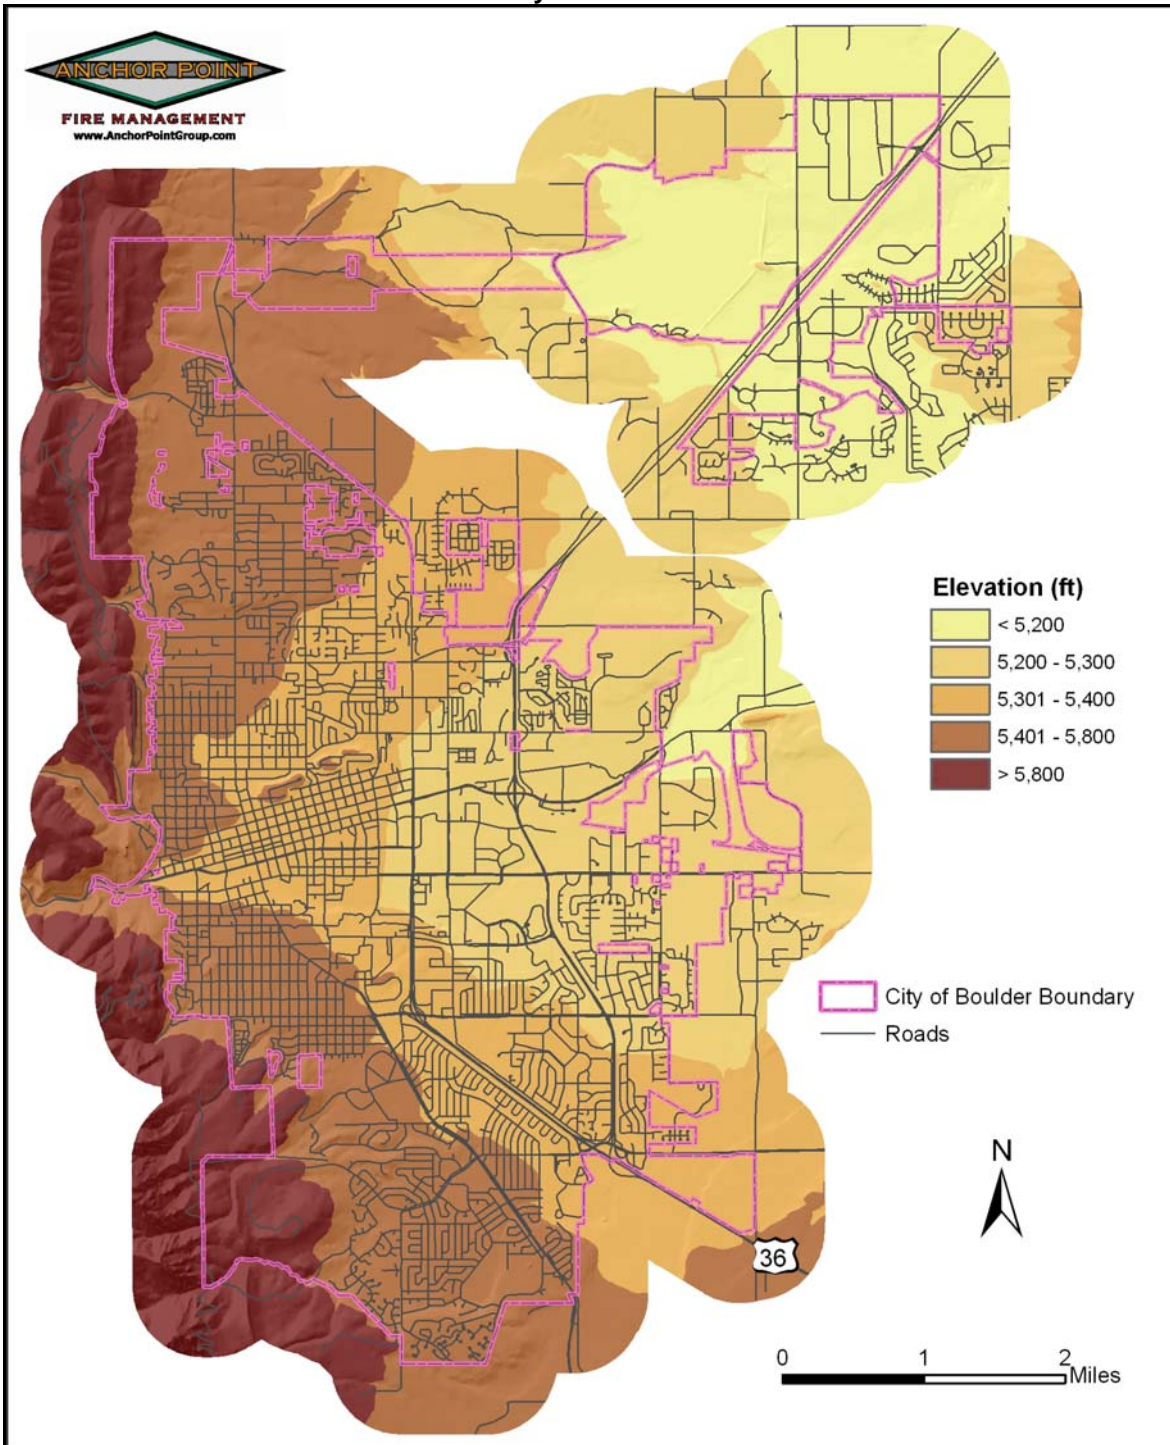

VALUES AT RISK

Life Safety and Homes

There are approximately 93,000 citizens residing within the area serviced by the City of Boulder. The wildland/urban interface areas were divided into 10 communities. 9 of the 10 communities are located within close proximity to the foothills. The areas within each community represent certain dominant hazards from a wildfire perspective. Fuels, topography, structural flammability, availability of water for fire suppression, egress and access difficulties, as well as other hazards both natural and manmade, are considered in the overall hazard ranking of these communities. Of the 10 communities in the study area, the hazard assessment identified 3 that were rated very high hazard areas. Under extreme burning conditions, there is a likelihood of rapid increases in fire intensity and spread in these areas due to fast burning or flashy fuel components, and topographic features that contribute to channeling winds and promotion of extreme fire behavior. These areas may also represent a threat to life safety due to egress issues, and the likelihood of heavy smoke and heat.

The population of the City of Boulder is growing steadily – between 1990 and 2000 there was an increase of 10% – and elevated development and recreational pressures follow this increase in population.³

Boulder County has a recorded history of forest fires dating back to June 29, 1916 when 1,000 acres burned around Bear Mountain.⁴ Boulder County experiences an average of 100 fire starts per year. Over the past 20 years the county has seen a number of major wildland fires, and until 2001, held the Colorado record for structural losses from wildland fires. This was due largely to the 1989 Black Tiger Fire, which claimed 44 homes.

Commerce and Infrastructure

Commercial property and retail business are very limited within the Wildland-Urban Interface portions of the City of Boulder, although a small percentage of residents maintain a variety of home-based businesses. Agricultural properties and livestock-related businesses also exist in some portions of the study area.

A significant component in both the *Boulder County Comprehensive Plan* and a majority of the local municipal plans and programs is recognition of the importance of environmental factors, natural and cultural amenities, or "quality of life" issues to the health of the economy. The Boulder County economy has benefited from its legacy of careful land use decisions and its open space lands, including national and state parks, national and state forests, and city and county open space and parks.⁵ The economy of the area is based largely on the quality of life that attracts professionals to establish residences there. Wildfire, therefore, has the potential to cause significant damage to the local economy.

3 <http://quickfacts.census.gov/qfd/states/08/0807850.html>. referenced 8-14-07

4 <http://www.co.boulder.co.us/sheriff/fire/firehistory.htm>. referenced 5-25-07

5 Boulder County Comprehensive Plan – Boulder County Land Use Department (<http://www.co.boulder.co.us/lu/bccp/introduction.htm>)

Recreation and Lifestyle

The culture of the City of Boulder and Boulder County in general emphasizes environmental values and outdoor recreation.

Boulder citizens enjoy over 43,000 acres of city open space land in and around the city. Some of the land is in agricultural production, which helps to preserve the historic cultural landscape of Boulder County while keeping the land open for wildlife and passive recreational uses. In addition to the aesthetic pleasure of Boulder's Open Space & Mountain Parks, an extensive trail system is available for hikers and horseback riders. Bicyclists enjoy riding on designated trails. Annual visitation is estimated at 5.3 million per year.⁶

In 1978 the *Boulder County Comprehensive Plan* was adopted. The plan included goals and policies for preserving open space, protecting environmental resources (including both natural and cultural resources) and developing a county-wide trail system. The implementation of the open space plan has been based both on private cooperation and on the county's financial ability to acquire an interest in these lands.

By early 1998, the county parks and open space program comprised more than 52,000 acres of preserved land scattered throughout the county, along with 70 miles of trails. The majority of this land is open for public use. The remainder is under agricultural lease or conservation easements, which do not include public access. Most of the properties are well-suited to passive recreation (recreation development is limited to trails, parking areas/trailheads, picnic areas/shelters, outhouses, and simple boat docks or fishing piers where necessary).

Residents who live in the study area have a keen appreciation for their natural environment. Recreation and the natural beauty of the area – values which can be seriously damaged by wildfire – are frequently quoted as reasons local residents have chosen to live in the study area.

Habitat Effectiveness & Environmental Resources

Residents are clear that the preservation of wildlife and the environment is important to the quality of life of the area. Habitat effectiveness is defined as the degree to which habitat is free of human disturbance and available for wildlife to use. Effective habitat is mostly undisturbed land area, which is buffered (at least 300 feet in essentially all situations) from regular motorized and non-motorized use of roads and trails (11 or more people or vehicle trips per week). The general rule is that habitat effectiveness should not fall below 50%; the best wildlife habitats have a much higher percentage.⁷ Wildfire, specifically severe wildfire, can have significant adverse effects on habitat effectiveness.

The environmental character of Boulder County is due in large measure to the abrupt altitudinal variation within a 20-mile east-west gradient. The dramatic landform changes sharply define the native ecosystems and their associations of plant and animal species.

The county's environmental heritage includes non-renewable resources such as natural areas, historic/archaeological sites and natural landmarks. As irreplaceable resources, they warrant preservation from destruction or harmful alteration. Wetlands are critical environmental

⁶ http://boulder.colorado.gov/index.php?option=com_content&task=view&id=1167&Itemid=1085. referenced 8-14-07

⁷ Peak to Peak Community Indicators Project 2003 Presented by Peak to Peak Healthy Communities Project ©Copyright 2003 Peak to Peak Healthy Communities Project

resources that function variously as wildlife habitat, aquifer recharge areas, and linkages in the overall county wildlife system, and aids for smog control.

The goal of the *Boulder County Comprehensive Plan* is to maintain and monitor the forests on open space land in ways that will benefit the ecosystem and the public. Activities include:

- Assessing overall forest conditions through forest inventories and surveys
- Implementing prescriptions based on the results of these inventories and surveys
- Taking action to change or increase the individual tree's health and vigor
- Reducing fire danger
- Improving or maintaining wildlife habitat
- Maintaining and preserving the aesthetic and ecological value of the forest

The City of Boulder CWPP process is in concert with these guiding comprehensive plan principles. Through public involvement, local support and a regional perspective, the fuels reduction elements described in this document can and should enhance and protect the values of the study area.

Current Risk Situation

For the purposes of this report the following definitions apply:

Risk is considered to be the likelihood of an ignition occurrence. This is primarily determined by the fire history of the area.

Hazard is the combination of the wildfire hazard ratings of the Wildland Urban Interface (WUI) communities and fire behavior potential, as modeled from the fuels, weather and topography of the study area.

The majority of the interface areas of the city are at a high risk for WUI fires. This assessment is based on the analysis of the following factors:

1. The City of Boulder is listed in the Federal Register as a community at high risk from wildfire (<http://www.fireplan.gov/reports/351-358-en.pdf>).
2. The area is shown in the Colorado State Forest Service WUI Hazard Assessment map to be an area of high Hazard Value (an aggregate of Hazard, Risk and Values Layers).
3. The City of Boulder responded to a total of 173 wildland fire incidents in the years from 2002 through 2006. These annual totals include fires responded to by the both fire and OSMP departments.
4. No major fires (fires greater than 100 acres) have burned in the city since 2002 (the Wonderland Lake Fire), but major fires have occurred near the city recently, including the Overland Fire (2003) and a number of large (100 acres +) grass fires in the winter of 2006. It is important to note there are over 20 fire departments in Boulder County, and many mutual aid agreements are in place. The Boulder area has a large number of well-trained resources. Ignitions in this area attract a rapid, professional response and are generally extinguished quickly.
5. Fire history statistics from the Colorado State Forest Service (CSFS) and their cooperator fire departments reflect an active fire history for the years available. CSFS reports 100 fires in 1990, 104 in 1991, 126 in 1992, and 98 in 1993, for a total of 428 in Boulder County for the four-year period.
6. The USDA Forest Service fire regime and condition class evaluation of forest stands in the study area shows that historic fire regimes have been moderately altered. Please see the *Fire Regime and Condition Class* section of this report for details.
7. The surrounding federal lands report an active, but far from extreme, fire history. Fire occurrences for the Boulder Ranger District of the Arapahoe-Roosevelt National Forest (see **Figure 6**) were calculated from the USDA Forest Service Personal Computer Historical Archive for the thirty-year period from 1977-2006. These areas represent federal lands adjacent to the study area, but do not include any data from state, county, or private lands. The data have been processed and graphed using the Fire Family Plus software program and are summarized below.

Figure 6a shows the number of fires (red bars) and the total acres burned (blue hatched bars) in the Boulder Ranger District for each year. While the number of annual fires ranges from approximately 5 to over 30 fires per year, there is little year-to-year pattern to the variation. The single largest fire for acreage burned was the Overland Fire (2003). Of the 9,854 acres reported burned in the ranger district between 1977 and 2006, 3,869 were burned by the Overland fire.

Between 1977 and 2006 there were three other fires that burned more than 100 acres in the ranger district. The total number of acres burned was the greatest in 1988, when two large fires accounted for 3,922 acres burned. 1988 also had the highest number of fires on the Boulder Ranger District during the study period. A portion of the Black Tiger Fire also burned 1,804 acres in the Boulder Ranger District in 1989.


Figure 6b shows the percentage and number of fires between 1977 and 2006 occurring in each month of the year. July had the greatest number of fires, followed by June and August. The fewest fires occurred between the months of November and April, a fact which reflects the climate conditions for the area.

Figure 6c shows the size class distribution of fires. Approximately 98% of the reported fires (362 of 369) were less than 10 acres in size. These statistics reflect the widely held opinion that, throughout the western US, the vast majority of fires are controlled during initial attack.

Figure 6d shows the number of fires caused by each factor. As shown in this graph, the most common cause of ignitions is lightning (50%). However, the next most common cause is campfires (30%). If we remove the miscellaneous cause category, natural causes still represent the majority of ignitions (56% natural and 44% human-caused), but it should be noted that these numbers are for national forest areas which lack the concentrated development and many other risk factors present in the portions of the study area where private land is dominant.


Figure 6e shows the number of fire starts for each day that a fire start was recorded. Most fires (299) occurred on days that only had one fire start. Approximately 8% (26) of fire days had two fire starts recorded and days with three or more fire starts represent less than 2% of all fire start days. The statistics suggest that multiple start days are a rare occurrence compared to fire days with a single ignition.

FIGURE 6. USFS Fire Statistics (Boulder Ranger District)

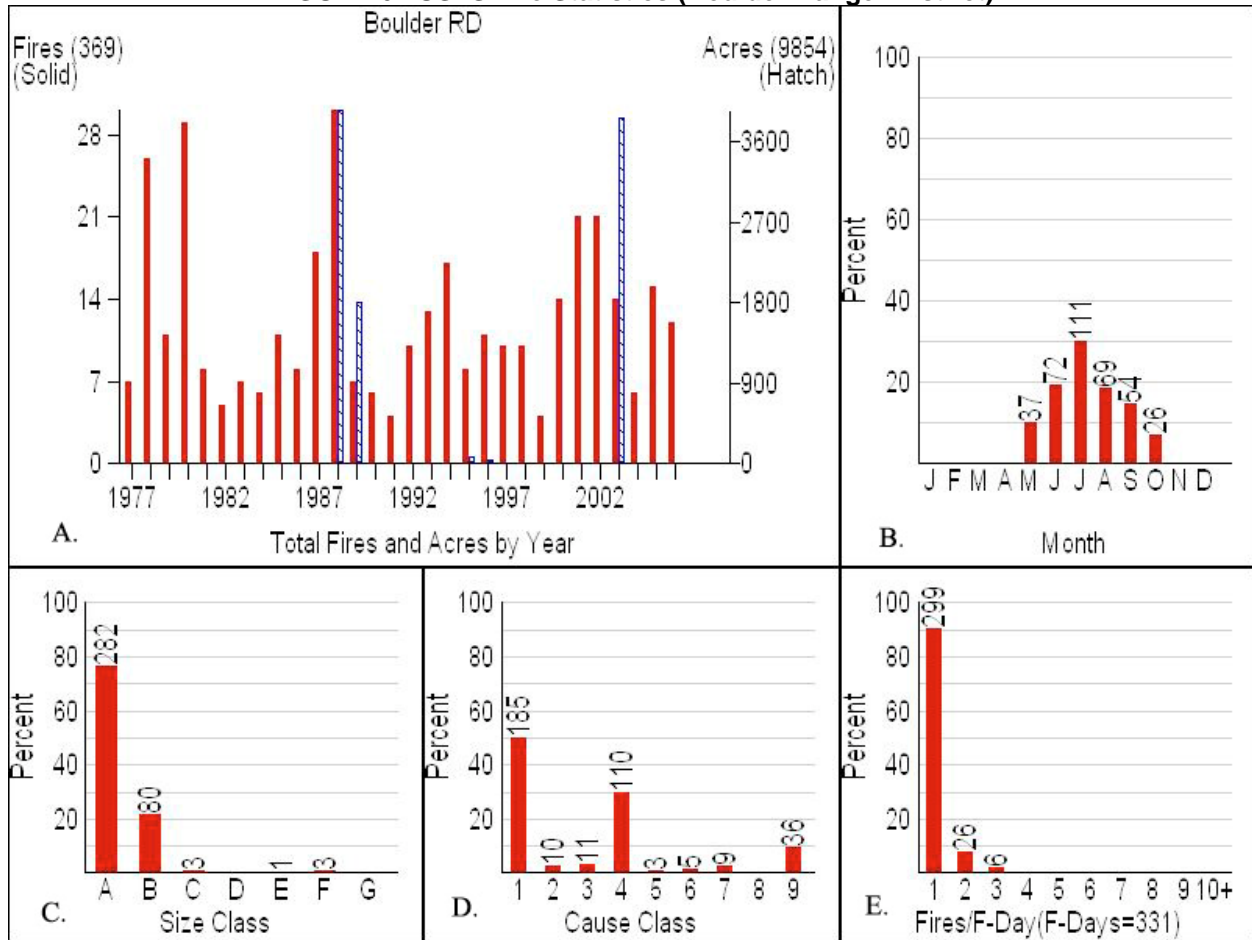

Size Class (in acres)	A	B	C	D	E	F	G		
	< ¼	¼ - 9	10 - 99	100-299	300-999	1000 - 4999	5000 +		
Causes	1	2	3	4	5	6	7	8	9
	Lightning	Equipment	Smoking	Campfire	Debris Burning	Railroad	Arson	Children	Misc.

FIGURE 7. USFS Fire History Data Extent

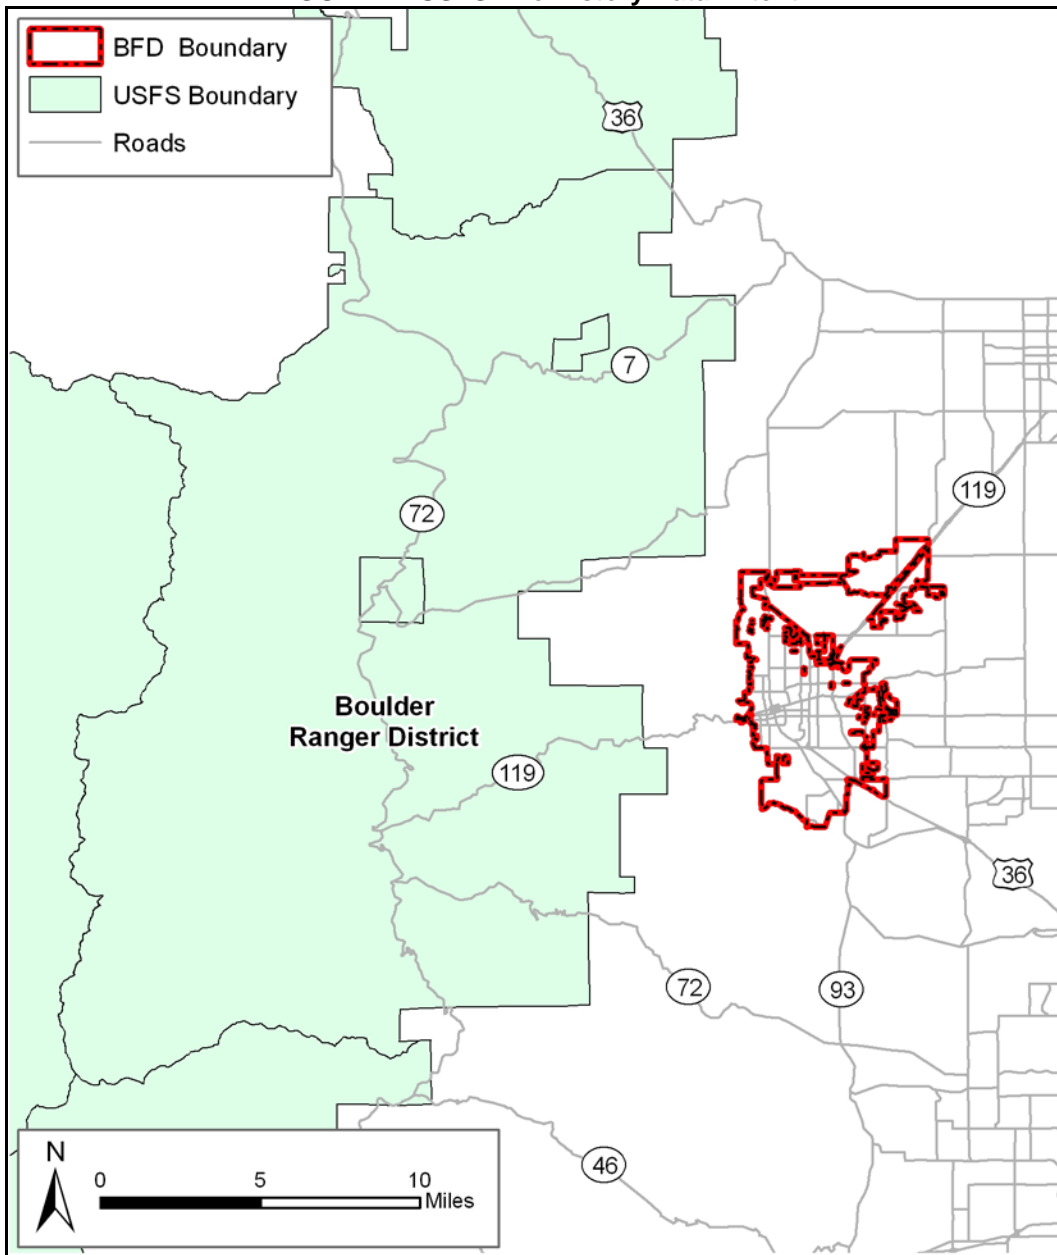


As the density of structures and the number of residents in the interface increases, possible ignition sources will multiply. Unless efforts are made to mitigate the potential for human ignition sources spreading to the surrounding forest, the probability of a large wildfire occurrence will undoubtedly increase.

Fire Regime Condition Class

The Fire Regime Condition Class (FRCC) is a landscape evaluation of expected fire behavior as it relates to the departure from historic norms. The data used for this study is from a national level map. The minimum mapping unit for this data is 1 square kilometer. FRCC is not to be confused with BEHAVE and FlamMap fire behavior models (detailed in the fire behavior section) which provide the fire behavior potential analysis for expected flame length, rate of spread and crown fire development.

The FRCC is an expression of the departure of the current condition from the historical fire regime. It is used as a proxy for the probability of severe fire effects (e.g., the loss of key ecosystem components - soil, vegetation structure, species, or alteration of key ecosystem processes - nutrient cycles, hydrologic regimes). Consequently, FRCC is an index of hazards to the status of many components (e.g., water quality, fish status, wildlife habitats, etc.). **Figure 8** displays graphically the return interval and condition class of the study area.

FIGURE 8. Fire Regime/Condition Class

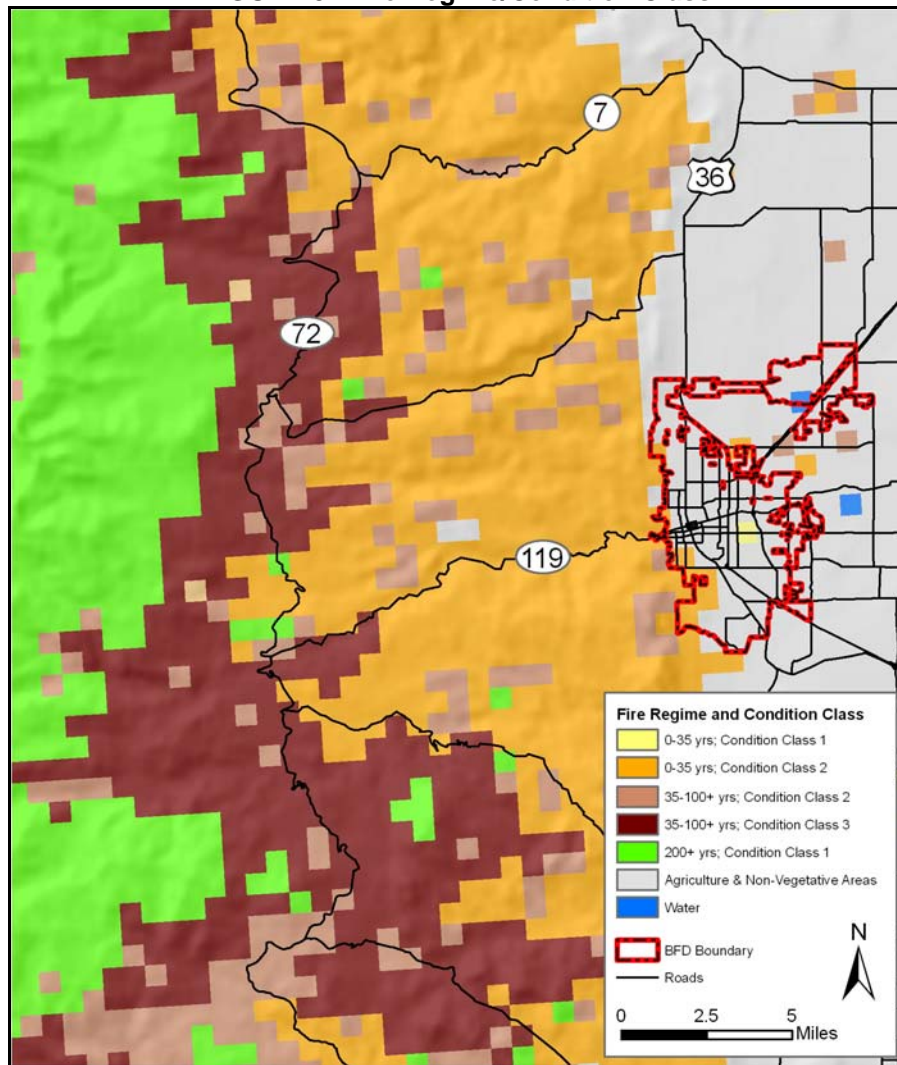


Deriving FRCC entails comparing current conditions to some estimate of the historical range that existed prior to substantial settlement by Euro-Americans. The departure of the current condition from the historical baseline serves as a proxy for probable ecosystem effects. In applying the condition class concept, it is assumed that historical fire regimes represent the conditions under which the ecosystem components within fire-adapted ecosystems evolved and have been maintained over time. Thus, if it is projected that fire intervals and/or fire severity have changed from the historical conditions, then it would be expected that fire size, intensity, and burn patterns would also be subsequently altered if a fire occurred. Furthermore, if it is assumed that these basic fire characteristics have changed, then it is likely that there would be subsequent effects to those ecosystem components that had adapted to the historical fire regimes.

As used here, the potential of ecosystem effects reflect the probability that key ecosystem components would be lost if a fire were to occur within the COB study area. It should be noted that a key ecosystem component can represent virtually any attribute of an ecosystem (for example, soil productivity, water quality, floral and faunal species, large-diameter trees, snags, etc.).

The following categories of condition class are used to qualitatively rank the potential of effects to key ecosystem components:

TABLE 3. Condition Class Descriptions⁸



Condition Class	Condition Class Description
1	Fire regimes are within their historical range and the risk of losing key ecosystem components as a result of wildfire is low. Vegetation attributes (species composition and structure) are intact and functioning within an historical range. Fire effects would be similar to those expected under historic fire regimes.
2	Fire regimes have been moderately altered from their historical range. The risk of losing key ecosystem components as a result of wildfire is moderate. Fire frequencies have changed by one or more fire-return intervals (either increased or decreased). Vegetation attributes have been moderately altered from their historical range. Consequently, wildfires would likely be larger, more intense, more severe, and have altered burn patterns, as compared with those expected under historic fire regimes.
3	Fire regimes have changed substantially from their historical range. The risk of losing key ecosystem components is high. Fire frequencies have changed by two or more fire-return intervals. Vegetation attributes have been significantly altered from their historical range. Consequently, wildfires would likely be larger, more intense, and have altered burn patterns, as compared with those expected under historic fire regimes.

The communities of the study area are dominantly classified under Condition Class 2. By definition, historic fire regimes have been moderately altered. Consequently, wildfires are likely to be larger, more severe, and have altered burn patterns, as compared with those expected under historic fire regimes.

⁸ Fire Regime Condition Class, website, <http://www.frcc.gov/>, July 2005.

Fire Behavior Potential

As a part of the wildfire hazard analysis carried out for this study, the fire behavior potential of the study area was modeled (see **Appendix A**). This model can be combined with the community wildfire hazard ratings (WHR), structure density and Values at Risk information to generate current and future “areas of concern.” **Figures 9-11** show the fire behavior potential for the analysis area, given the average weather conditions existing between May 1 and October 31. Weather observations from the Sugarloaf Remote Automated Weather Station (RAWS) were averaged for a thirty-year period (1977-2006) to calculate these conditions.

Figures 12-14 show the fire behavior potential for the analysis area, given ninety-seventh percentile weather data. In other words, the weather conditions existing on the five most severe fire weather days in each season for the thirty-year period were averaged together to provide the weather data for this calculation. It is a reasonable assumption that similar conditions may exist for at least five days of the fire season during an average year. In fact, during extreme years such as 2000 and 2002, such conditions may exist for significantly longer periods.

Weather conditions are extremely variable and not all combinations are accounted for. These outputs are best used for pre-planning and not as a stand-alone product for tactical operations. This model can be combined with the WHR and Values at Risk information to generate current and future “areas of concern,” which are useful for prioritizing mitigation actions. It is recommended that when this information is used for tactical operations, fire behavior calculations be done with actual weather observations during the fire event. For greatest accuracy, the most current Energy Release Component (ERC) values should be calculated and distributed during the fire season to be used as a guideline for fire behavior potential. For a more complete discussion of the fire behavior potential methodology, please see **Appendix A**.

FIGURE 9. Flame Length, Moderate Conditions

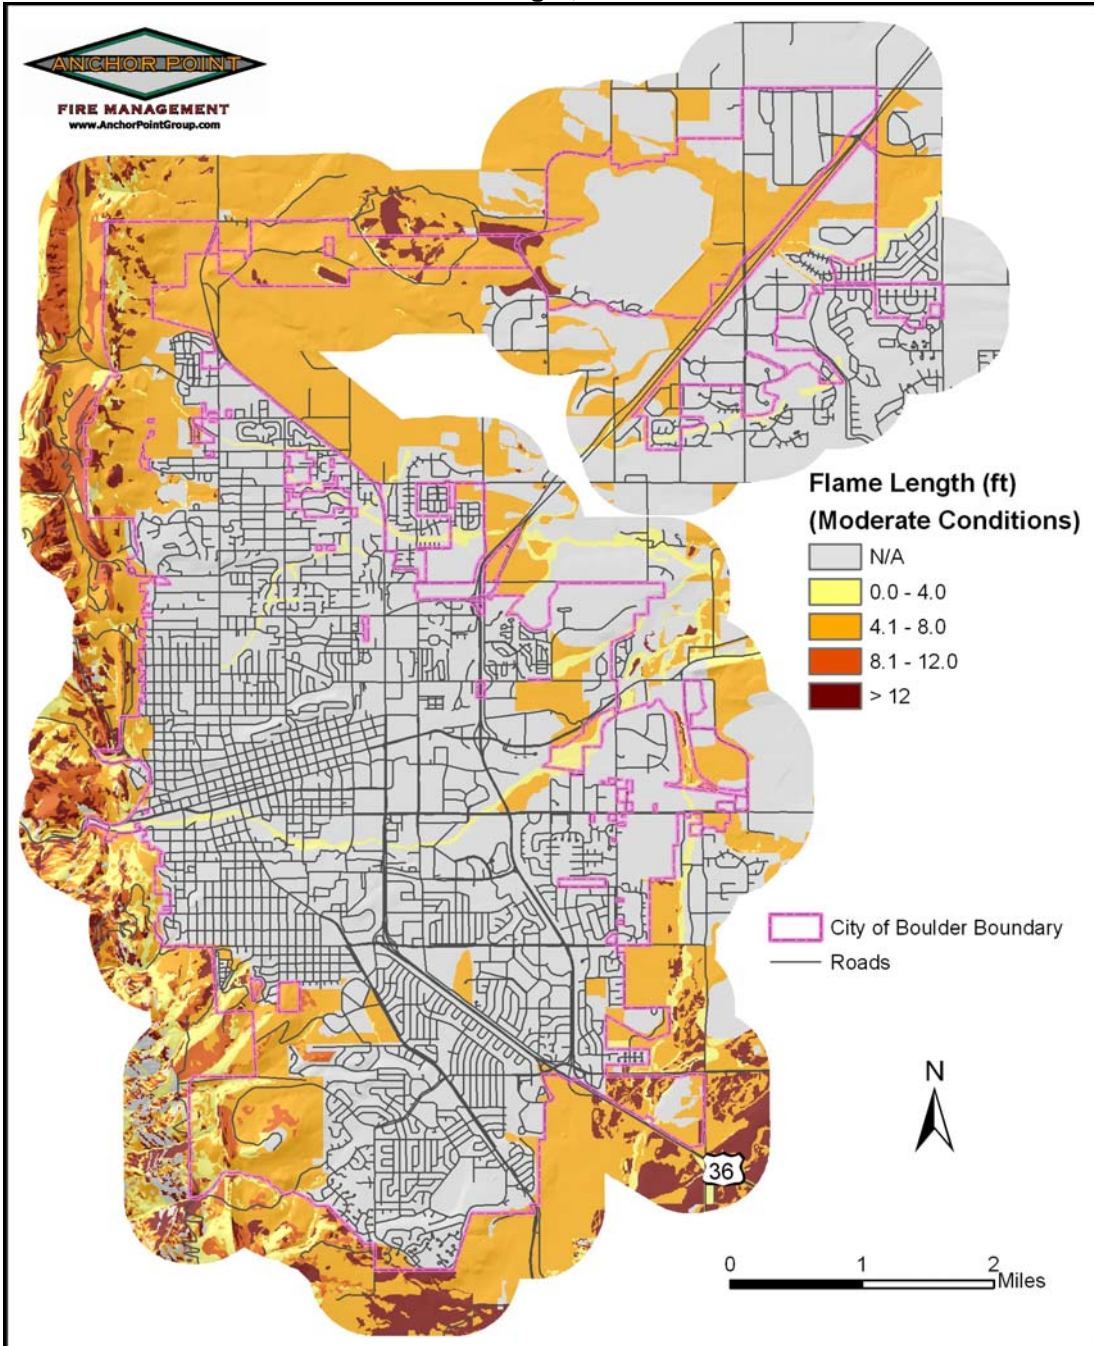


FIGURE 10. Rate of Spread, Moderate Conditions

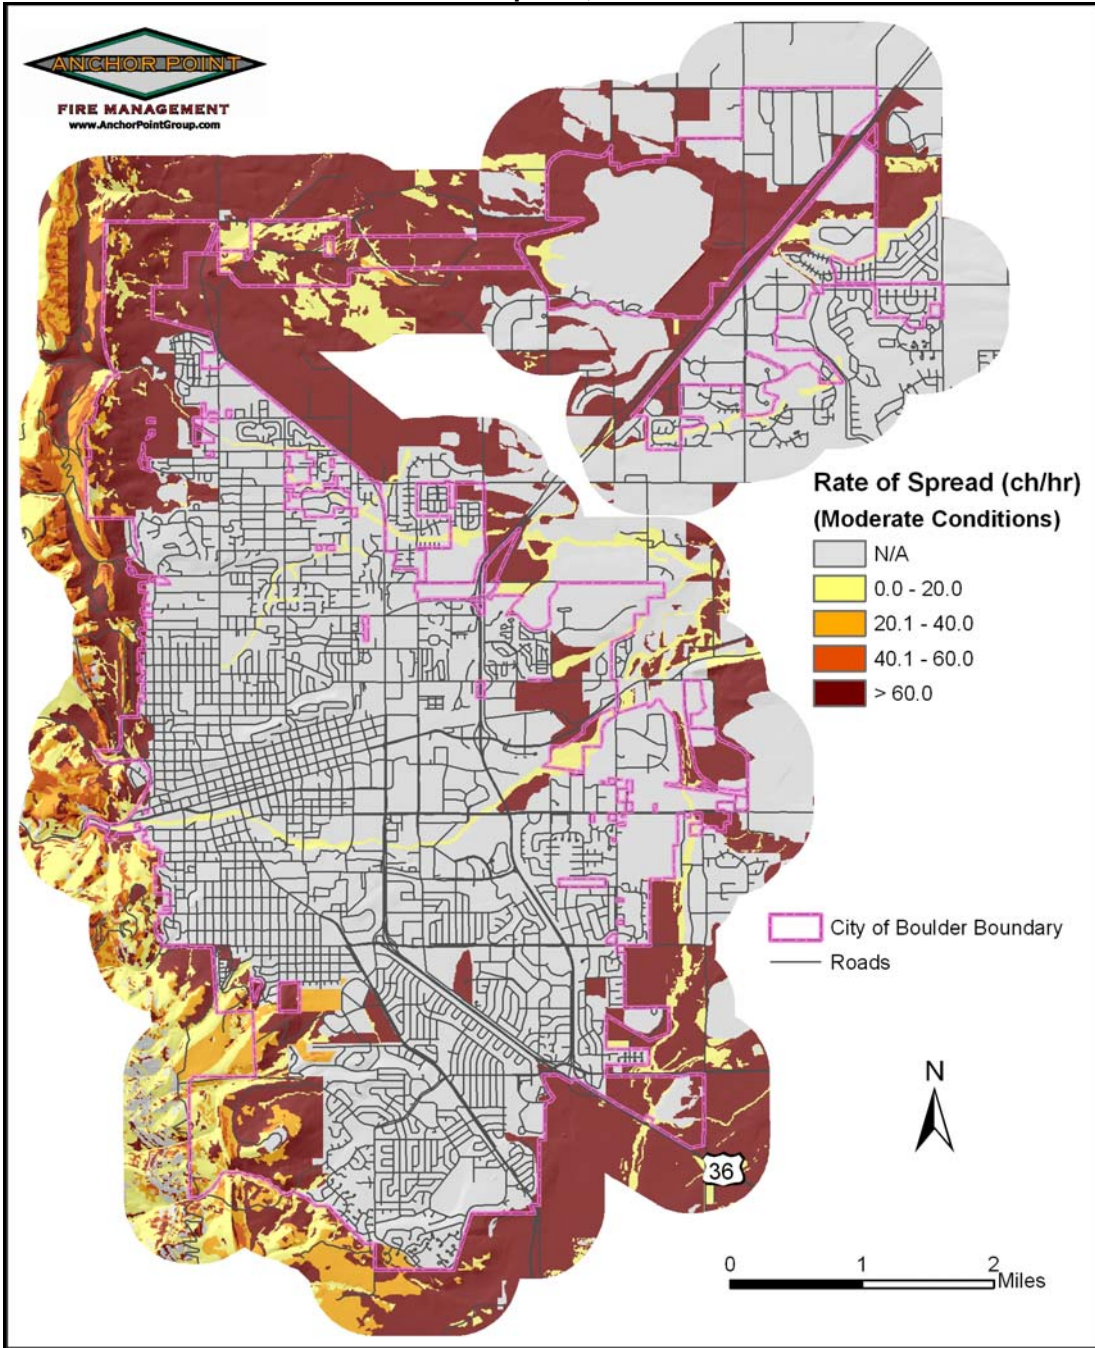


FIGURE 11. Crown Fire Potential, Moderate Conditions

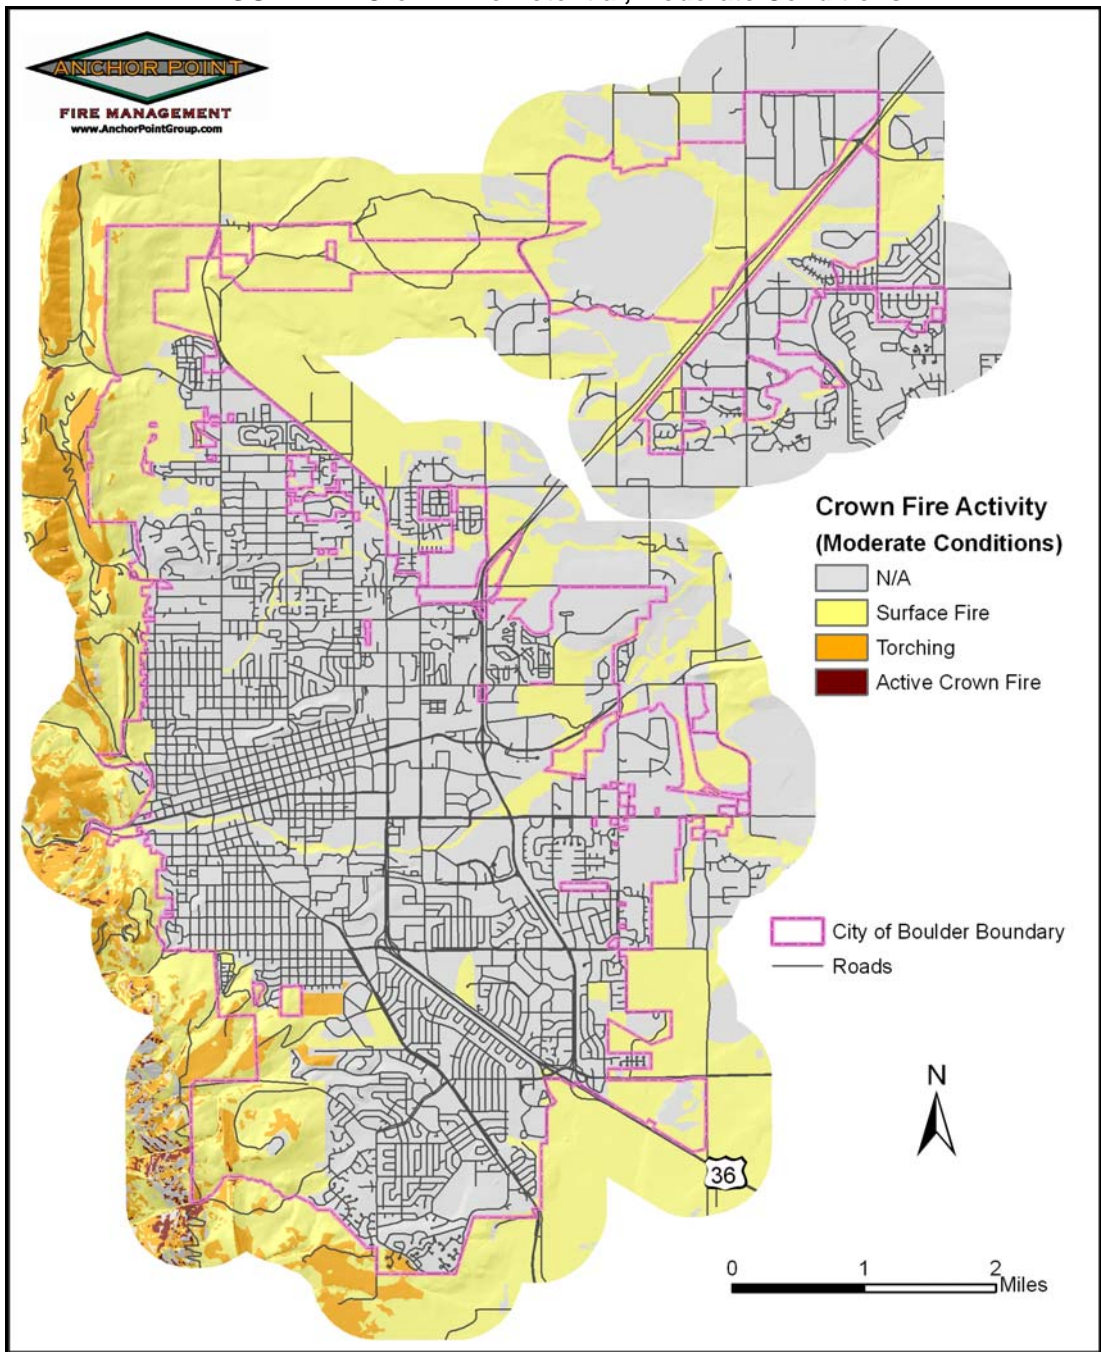


FIGURE 12. Flame Length, Extreme Conditions

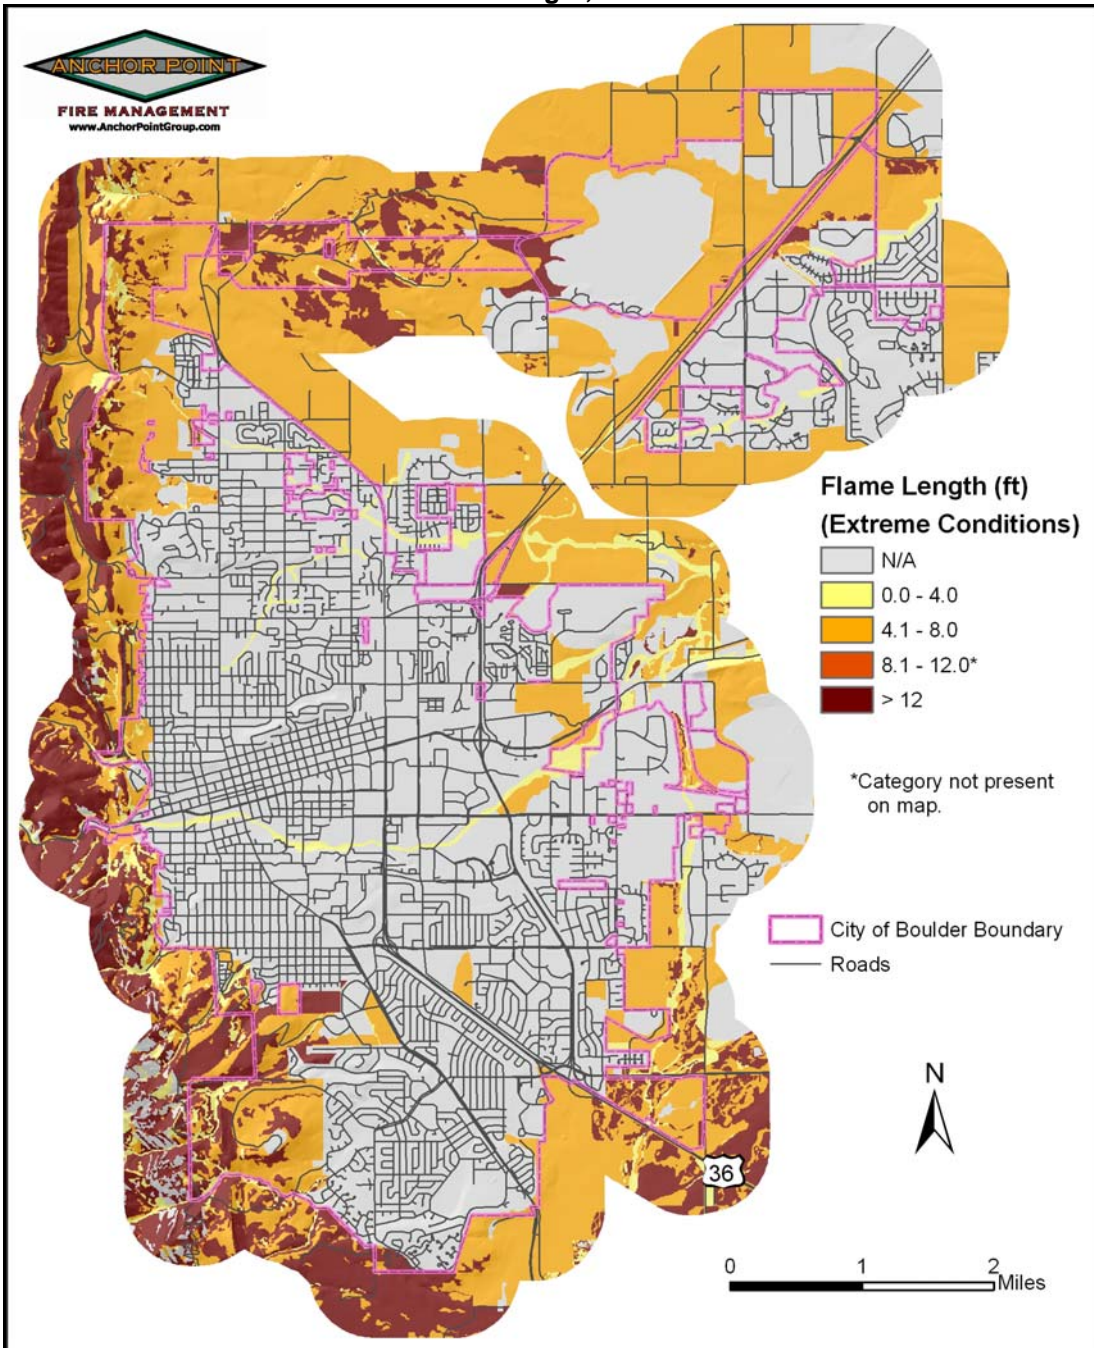


FIGURE 13. Rate of Spread, Extreme Conditions


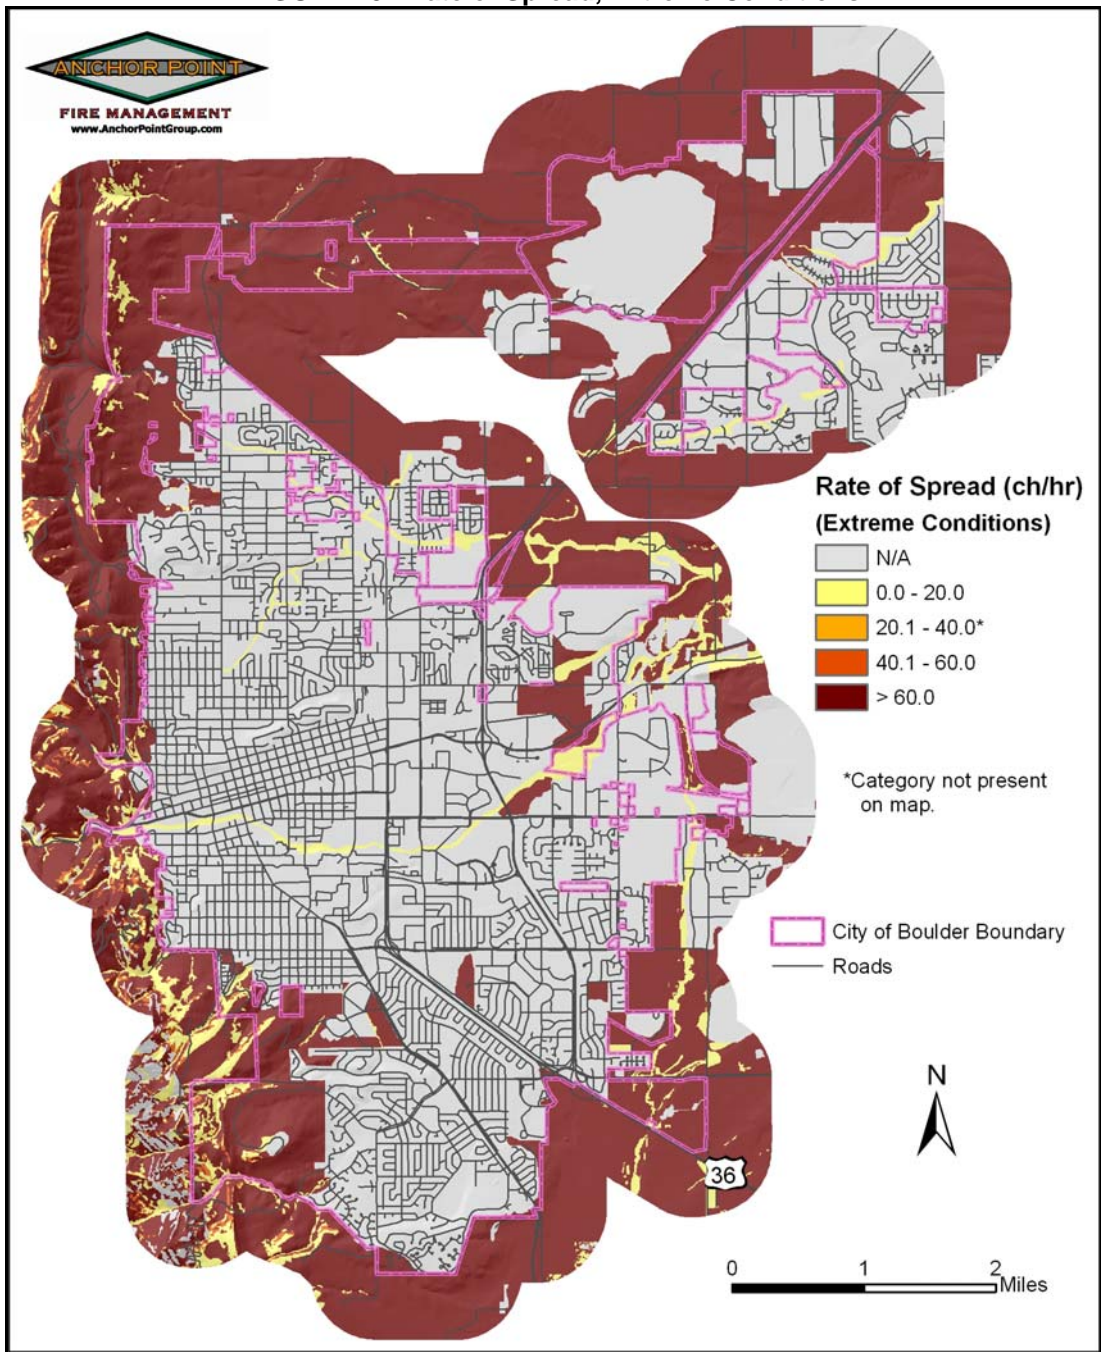


FIGURE 14. Crown Fire Potential, Extreme Conditions

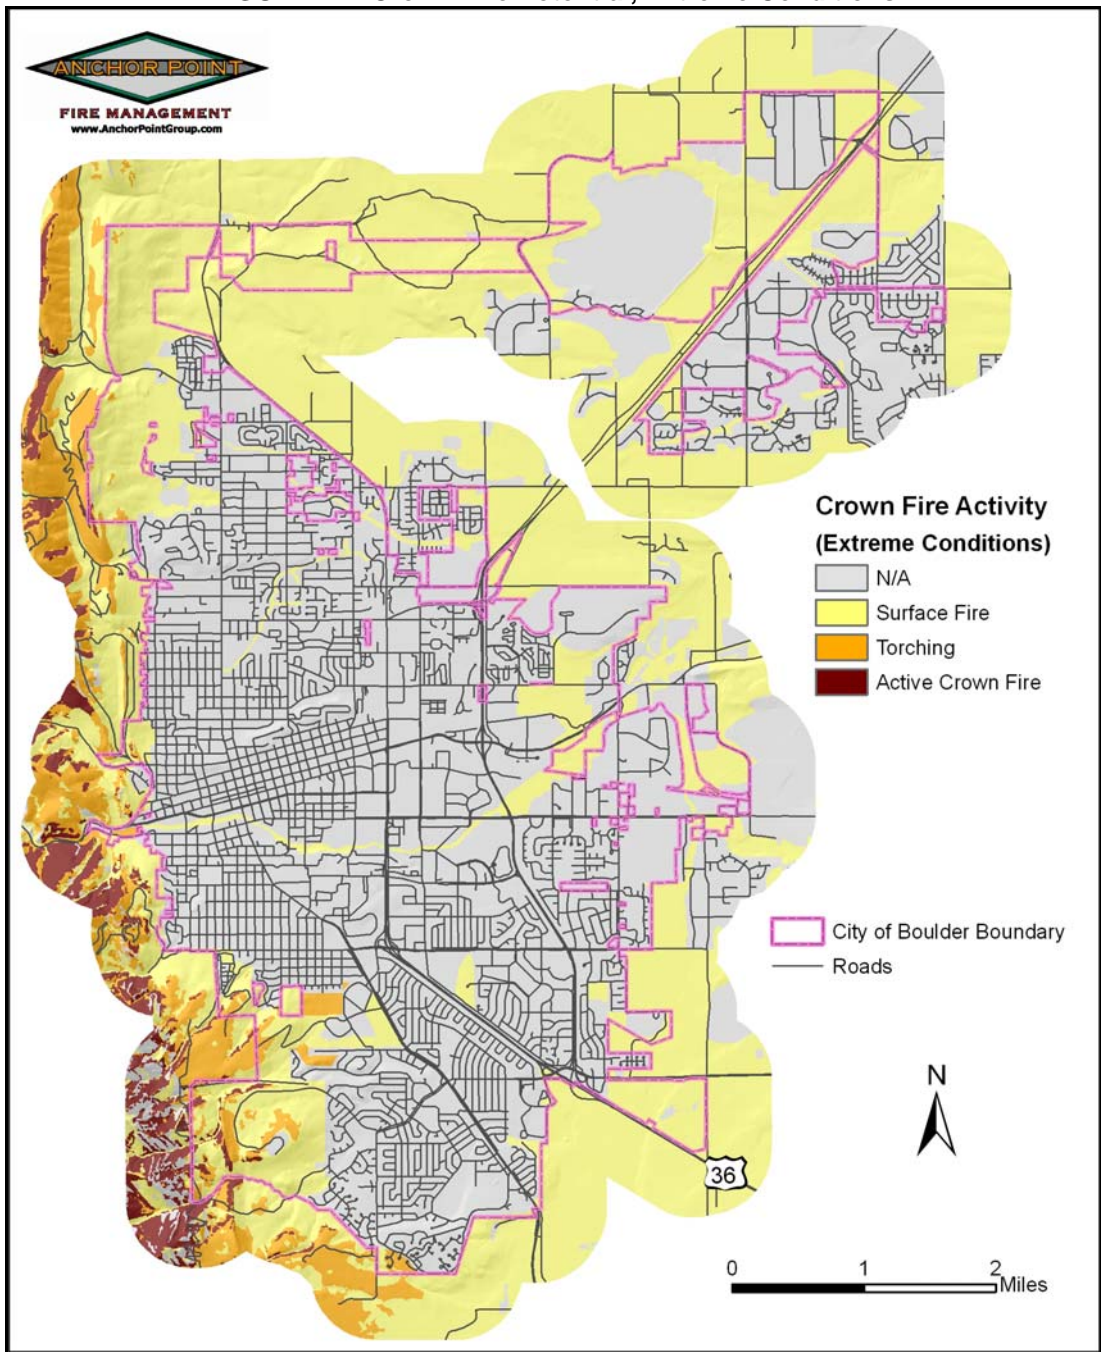

SOLUTIONS AND MITIGATIONS

Establishing and Prioritizing Fire Management Units (FMUs)

An efficient method for prioritizing work efforts is to create FMUs. These units reflect a particular function, like developing an effective public outreach program, or a geographic treatment area, such as an area with related fuel reduction projects. FMUs are created prior to initiating management projects and mitigation activities. Unique activities and objectives are recommended for each unit. These solutions are designed to serve as proposed outlines for projects. They are presented as a starting point for communities to determine the priority and scope of the final project implementation. Local land and fire management agencies, with the input of the citizen's advisory council or fire safe council, must determine the final solutions.

The following FMUs have been identified for the City of Boulder, and recommendations are provided for each. FMUs are **not** ranked by priority, but priority recommendations have been provided for specific tactical mitigation actions where appropriate within FMUs.

- Safety Zones, Addressing, Access, and Evacuation Routes FMU
- Public Education FMU
- Local Preparedness and Firefighting Capabilities FMU
- Home Mitigation FMU
- Plains Communities FMU
- Fuels Modifications FMU
- Water Supply FMU

SAFETY ZONES, ADDRESSING, ACCESS, AND EVACUATION ROUTES FMU


Safety Zones

When pre-planning for a wildfire incident, designating safety zones for use by the responding firefighters should be a top priority. More than one safety zone is advised, because fire operations can be spread out over a large geographical area. When evaluating areas to be used, they must be easily accessible and adhere to current guidelines recommended by NWCG. (See **Figure 15**)

FIGURE 15. Safety Zone Guidelines

Flame Height	Distance Separation (firefighter to flame)	Area in Acres
10 feet	40 feet	1/10 acre
20 feet	80 feet	1/2 acre
50 feet	200 feet	3 acres
75 feet	300 feet	7 acres
100 feet	400 feet	12 acres
200 feet	800 feet	50 acres

(1 acre = 208 feet x 208 feet, or the approximate size of a football field)

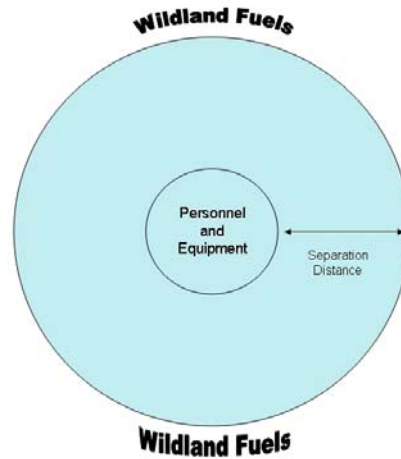

Distance separation (minimum) is the radius from the center of the safety zone to the nearest fuels.⁹

RECOMMENDATIONS:

There are numerous areas within close proximity to the interface communities that could serve as designated safety zones. Options would include large city parks, looped secondary streets, and business parking lots. These locations should be evaluated by City of Boulder personnel, and if viable inserted in the run books.

⁹ <http://www.nwcg.gov/pms/pubs/410-1/chapter01.pdf> referenced March 20, 2007

Addressing

Addressing overall within the City of Boulder is good. However, there are some areas that have poor and/or inconsistent street signage and addressing of properties. In the worst cases, addressing was missing altogether or attached to combustible objects. (See **Figure 16**.) Some of the interface areas in Boulder have very intricate roads and driveways. In these areas, proper, standardized, reflective signage is critical to effective response. Response times are substantially reduced, especially at night and in difficult conditions, by standardized addressing. Knowing at a glance the difference between a road and a driveway (and which houses are on the driveway) cuts down on errors and time wasted interpreting maps. This is especially true for city employees who have not had the opportunity to train on access issues as often as career emergency responders. Standardized reflective signage mounted on a non-combustible pole is highly recommended. These signs can be used in addition to the current markers.

Recommendations for address markers can be found in **Appendix D**.


FIGURE 16.



Proposed Emergency Access Trail

The primary concern within the Shanahan West Area (**Very High Hazard rating**) is a lack of emergency access into open space. Currently there are several foot paths in the area, none of which would serve to assist with firefighting or other emergency situations. A proposed emergency access trail is highlighted as #5 in **Figure 17**.

FIGURE 17.

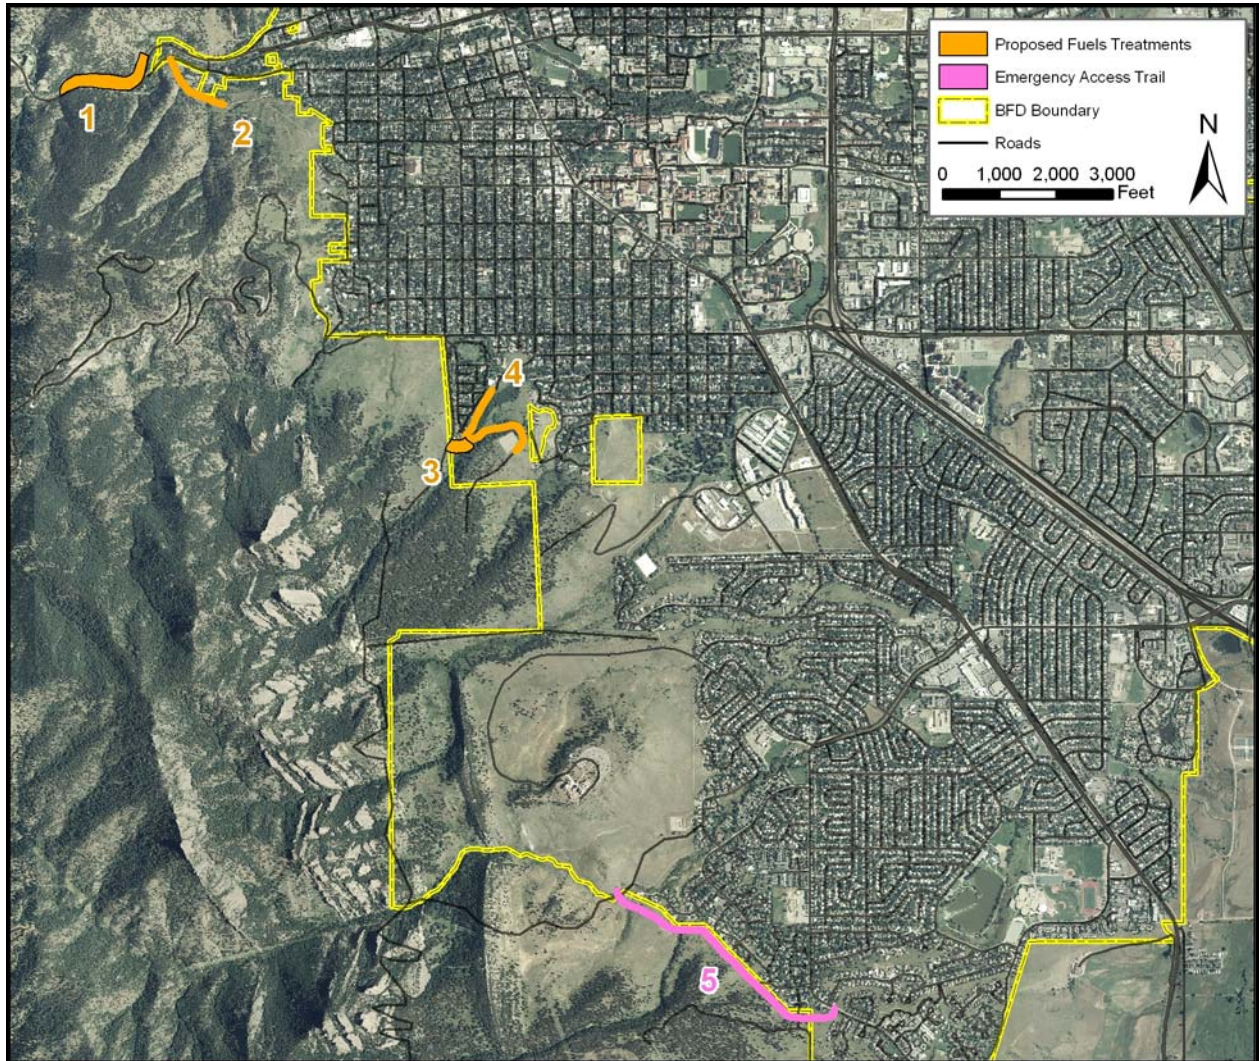

EMERGENCY ACCESS TRAIL RECOMMENDATIONS:

The route is represented graphically by # 5 within **Figure 17**.

5. **Lehigh Street to Bear Creek trail. Priority Level High.** This project focuses on establishing an emergency access trail through the open space area beginning at Lehigh Street (between Hardscrabble Drive and Lafayette Drive) and running in a northwest direction to tie in to the Bear Creek trail. Portions of this trail would make use of existing footpaths, which would need to be widened. The trail surface should be able to support a type 6 engine (larger-sized four wheel drive vehicle). Fuels mitigation consisting of limbing and thinning to create a safe, effective escape route is also recommended (see the *Access Route Fuels Modification Projects* section of this report). This project might require a cooperative effort between the City and private landowners. It is recommended that the route be well marked. This emergency access trail could also be used as a regular recreation trail.


A significant amount of effort should be devoted to educating the homeowners in this area about the importance of this project.

- **Open Space Access Signage. Priority Level High.** All open space access points should be clearly marked both on-site and within the City emergency response map books. Access points that are secured from opening should have a common key, combination, or device (radio frequency activation, opticom, etc.) carried by all City responders.

Evacuation Routes

Wildfire evacuation routes and recommendations have been pre-designated by City of Boulder officials prior to this report. These routes are highlighted in **Figure 18**.

FIGURE 18. Evacuation Routes

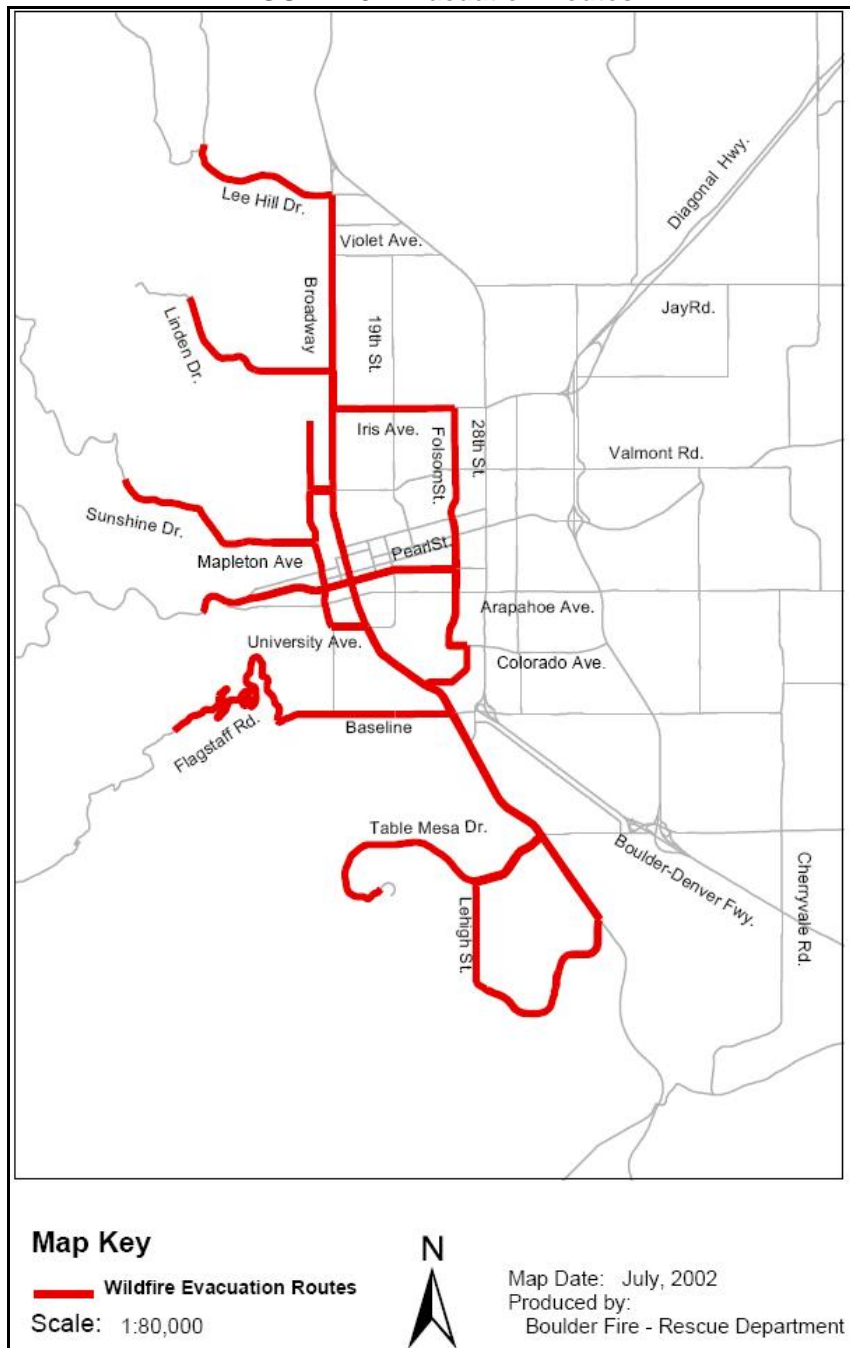

EVACUATION ROUTE RECOMMENDATIONS:

Prepare

Evacuation Plan - All family members need to know what to do if evacuated or unable to return home. Know local evacuation routes.

House Address - Make sure house numbers are visible from the street.

Meeting Place - Designate a meeting place away from home well known to family.

Contact Person - Choose an out-of-the-area contact person to relay information about your welfare to family and friends **and** to keep your phone lines open.

Medical Needs - Assemble prescription drugs, etc. for evacuation.

Documents - Collect birth certificates, social security cards, wills, account numbers, policies, securities, pictures, household inventory and portable valuables for easy evacuation.

Pets - Assemble pet-kit with food, leashes, and medicines for easy evacuation.

Evacuate

Evacuate Immediately - Wildfire is unpredictable and moves fast!

Contact Numbers - Put a note on the door with your contact phone numbers so you may be located in the event firefighters need to reach you.

Turn on outdoor house lights - This helps firefighters locate your house.

Shelter - Shelter locations will be announced based on location of fire.¹⁰

¹⁰ http://bouldercolorado.gov/index.php?option=com_content&task=view&id=2408&Itemid=779 referenced 08-16-07

OTHER GENERAL RECOMMENDATIONS:

1. In order to reduce conflicts between evacuating citizens and incoming responders, it is desirable to have nearby evacuation centers for citizens and staging areas for fire resources. Evacuation centers should include heated buildings with facilities large enough to handle the population. Schools and churches are usually ideal for this purpose. Fire staging areas should contain large safety zones, a good view in the direction of the fire, easy access and turnarounds for large apparatus, a significant fuel break between the fire and the escape route, topography conducive to radio communications, and access to water. Local responders are encouraged to preplan the use of potential staging areas with property owners.
2. Identify and pre-plan alternate escape routes and staging areas.
3. Perform response drills to determine the timing and effectiveness of fire resource staging areas.
4. Educate citizens on the proper escape routes and evacuation centers to use in the event of an evacuation.
5. Use a reverse 911 system or call lists to warn residents when an evacuation may be necessary. Notification should also be carried out by local television and radio stations. Any existing disaster notification systems, such as tornado warnings, should be expanded to include wildfire notifications.
6. Emergency management personnel should be included in the development of preplans for citizen evacuation.
7. Post placards clearly marking "fire escape route." This will provide functional assistance during an evacuation and communicate a constant reminder of wildfire to the community. Be sure to mount signage on non-combustible poles, preferably under the street name sign. The placards should start from the furthest point into the subdivision and work outward. These placards greatly assist responding firefighters from other agencies who may not be familiar with the layout of the subdivision.

Public Education FMU

The Boulder area is experiencing continuing development. Spiraling property values and a limited number of building sites have resulted in recently constructed, high-value residences mixed in with older homes, rental properties and historic buildings in various states of decay. There is likely to be a varied understanding among property owners of the intrinsic hazards associated with building in these areas. An approach to wildfire education that emphasizes safety and hazard mitigation on an individual property level should be undertaken, in addition to community and emergency services efforts at risk reduction. Combining community values such as quality of life, property values, ecosystem protection and wildlife habitat preservation with the hazard reduction message will increase the receptiveness of the public.

Field contacts and interviews indicate that some homeowners in the study area are very supportive and proactive regarding wildfire mitigation efforts. Unfortunately there are still homeowners and landowners who refuse to acknowledge the fact that they live in an area at risk for wildfires. Continued attempts to provide educational materials through personal contact should be conducted. Property owner education and the wildfire hazard mitigation message should be an ongoing effort throughout the front-range interface.

RECOMMENDATIONS

- Visit these web sites for a list of public education materials, and for general homeowner education:
 - <http://www.nwccg.gov/pms/pubs/pubs.htm>
 - <http://www.firewise.org>
 - <http://csfs.colostate.edu/protecthomeandforest.htm>
 - <http://www.bouldercolorado.gov>

- Provide citizens with the findings of this study including:
 - Levels of risk and hazard
 - Values of fuels reduction programs
 - Consequences and results of inaction for ignitions within the community

- Create a Wildland Urban Interface (WUI) citizen advisory council to provide peer level communications for the community. Too often, government agency advice can be construed as self-serving. Consequently, there is poor internalization of information by the citizens. The council should be used to:
 - Bring the concerns of the residents to the prioritization of mitigation actions
 - Select demonstration sites
 - Assist with grant applications and awards

- Continue to offer the All-Hazards Symposium. This is sponsored by the City of Boulder and the County of Boulder Office of Emergency Management.
 - Provide updates to the CWPP recommendations
 - Provide and receive citizen information

- A number of public recreation areas are present within the City of Boulder, (see **Areas of Special Interest** below). One recommendation for those areas is to provide wildfire education to the public via verbal contact, published literature, and signage.

Local Preparedness and Firefighting Capabilities FMU

The City of Boulder provides suppression services for the study area of this report.

- The fire department has seven career fire stations which service all types of emergency response including wildland fire. The Fire Department has a 16 member Wildland Fire Team; their qualifications range from Firefighter Type 2 to Division Supervisor.
- The Wildland Division of the Fire Department provides a supervisory staff of three and a seasonal fire/mitigation crew of 6. Their qualifications range from Firefighter Type 2 to Division Supervisor.
- The Open Space / Mountain Parks Department provide a seasonal mitigation crew of 4 and numerous other individuals (including Rangers) who are trained in wildland firefighting practices.

The City of Boulder maintains five type-1 engines, four type-6 brush trucks, two type-3 engines/ water tenders, five aeriels, one rescue, and one command vehicle. These apparatus are a mixture of hard and soft staffed. Not all of the above-mentioned apparatus respond from fire stations; in some cases, operators must first respond to a remote vehicle storage building to retrieve the apparatus.

As mentioned in other sections of this CWPP, the City of Boulder has taken pro-active steps in preplanning their WUI response areas. Good mapping coupled with individual home assessments is a critical step to attaining successful fire outcomes.

City of Boulder firefighters are trained and experienced in wildland fire. The city adheres to the National Wildfire Coordinating Group (NWCG) curriculum for training.

Several City of Boulder personnel possess more advanced wildfire qualifications and respond to wildfire incidents across the country. The experience they gain while assigned to large ongoing wildfire incidents provides numerous and important benefits. These benefits will greatly enhance the effectiveness of the City of Boulder when confronted with larger incidents.

Mutual aid is available from numerous other fire suppression agencies within Boulder County. It is also important to note that the City of Boulder contracts with a number of these agencies to provide fire protection to city lands outside of the study area focused on in this report. The following agencies provide aid to the City of Boulder: the Rocky Mountain Fire Protection District, Boulder Rural Fire Protection District, Lefthand Fire Protection District, Four Mile Fire Protection District, Boulder Mountain Fire Protection District, Sunshine Fire Protection District, Sugarloaf Fire Protection District, Hygiene Fire Protection District, Mountain View Fire Protection District, Coal Creek Fire Protection District, Indian Peaks Fire Protection District, Nederland Fire Department, Louisville Fire Department.

RECOMMENDATIONS:

- Firefighter Training (**Priority Level High**): Provide education and experience for all firefighters including:
- NWCG S-130/190 for all Fire Department and OSMP personnel.
- Annual wildland fire refresher for all Fire Department and OSMP personnel.
- Annual “pack testing” (physical standards test) for firefighters who are required to remain wildfire qualified in a position.

- Organize and facilitate an annual wildfire interface training exercise within the communities outlined in this CWPP.
- S-215 Fire Operations in the Urban Interface
- S-290 Intermediate Fire Behavior
- I-200 and I-300 – Basic and Intermediate ICS
- Encourage personnel to seek higher wildfire qualifications.
- Encourage personnel to participate in out of district wildfire assignments.
- Encourage prescribed burn participation.
- Encourage Type 3 incident management group participation and utilization.

Equipment:

- **Priority Level High.** House all wildfire apparatus in career fire stations. This will allow for a quicker 24/7 response.
- **Priority Level High.** For the Fire Department firefighters, provide gear bags for both wildland and bunker gear to be placed on apparatus responding to fire calls. This will help ensure that firefighters have both bunker gear and wildland PPE available when the fire situation changes.
- **Priority Level Moderate.** Purchase and equip two CDF style type 3 engines for interface firefighting. This engine should be equipped with a “light” structural complement (SCBA, TIC, etc.) so it can function (in a limited capacity) as a piece of structure apparatus.

Communications:

- **Priority Level High.** Acquire an 800 MHz / VHF interoperability “black box.” This device quickly permits the user to patch together multiple radio frequencies into one common channel.

Miscellaneous:

- **Priority Level Moderate.** Combine the Fire Department and OSMP seasonal fire/mitigation crews together. They could still be split into squads for daily project work, but the overall operating mode would be that of a handcrew/module to foster crew cohesiveness.
- **Priority Level High.** Ensure that the Wildland Urban Interface Address Map books are updated annually to include the individual home assessments. Every piece of apparatus (FD & OSMP) and all mutual aid agencies will need a copy. Supervisor vehicles will need multiple copies or the ability to generate multiple copies; this will allow for the distribution of specific maps to incoming mutual aid resources that may not have the most current maps.
- **Priority Level High.** The Wildfire Evacuation Information presented on the City of Boulder web site needs to be updated and improved.

Home Mitigation FMU

Community responsibility for self-protection from wildfire is essential. Educating homeowners is the first step in promoting shared responsibility. Part of the educational process is defining the hazard and risks both at the community- and at the parcel-level.

The community-level assessment identified six of the ten communities in the study area that are at very high or high risk. Construction type, condition, age, fuel loading of the structure/contents, and position are all contributing factors that make homes more susceptible to ignition under even moderate burning conditions. There is also a likelihood of rapid fire growth and spread in these areas, due to fast burning or flashy fuel components and other topographic features that contribute to channeling winds and promotion of extreme fire behavior.


Table 3 illustrates the relative hazard rankings for communities in the study area.

- A rating of eleven or less indicates an area of extreme hazard.
- A rating of 12 to 19 indicates a very high hazard.
- A rating of 20 to 25 indicates high hazard.
- A rating of 26 to 29 indicates moderate hazard.
- A rating of 30 or greater indicates a low hazard.

The communities with very high and high hazard ratings should be considered an FMU, where a parcel-level analysis should be implemented as soon as possible. For the communities that have already received a parcel-level analysis, a re-evaluation should be conducted if the analysis is more than 5 years old. Please see **Appendix B** for more detailed information.

The most important element for the improvement of life safety and property preservation for every home in the study area is compliant, effective defensible space. This is especially important for homes with wood roofs and homes located on steep slopes, in chimneys, saddles, or near any other topographic feature that contributes to fire intensity.

FIGURE 19. Saddle & Ridge Top Development¹¹

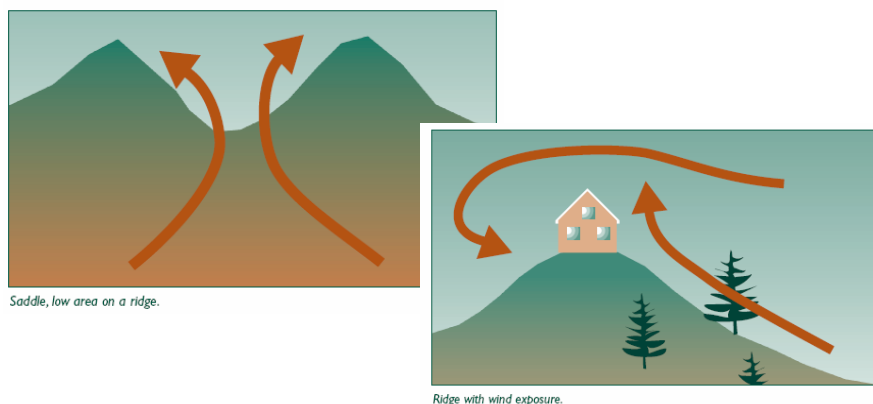


¹¹ FireWise Construction, Peter Slack, Boulder, Colorado

An aggressive program of evaluating and implementing defensible space for homes will do more to limit fire-related property damage than any other single recommendation in this report.

There is no question that any type of dense/flammable vegetation should be removed from around a home in order to reduce the risk of structural ignition during a wildfire. The question is how much should be removed? The basic rule is to eliminate all flammable materials (fire-prone vegetation, wood stacks, wood decking, patio furniture, umbrellas, etc.) from within 30 feet of the home. For structures near wildland open space, an additional 70 feet should be modified in such a way as to remove all dead wood from shrubbery, thin and trim trees and shrubs into "umbrella" like forms (lower limbs removed), and prevent the growth of weedy grasses (see **Figure 20**). Steep slopes and/or the presence of dangerous topographic features as described above may require the defensible space distances to be increased.

The term "clearance" leads some people to believe that all vegetation must be removed down to bare soil. This is not the case. Removing all vegetation unnecessarily compromises large amounts of forested terrain, increases erosion, and will encourage the growth of weeds in the newly disturbed soil. These weeds are considered "flashy fuels," which actually increase fire risk because they ignite so easily. Defensible space must be ecologically sound, aesthetically pleasing, and relatively easy to maintain. Only then will the non-prescriptive use of fuels reduction around homes become commonplace.

FIGURE 20. Defensible Space Zones¹²

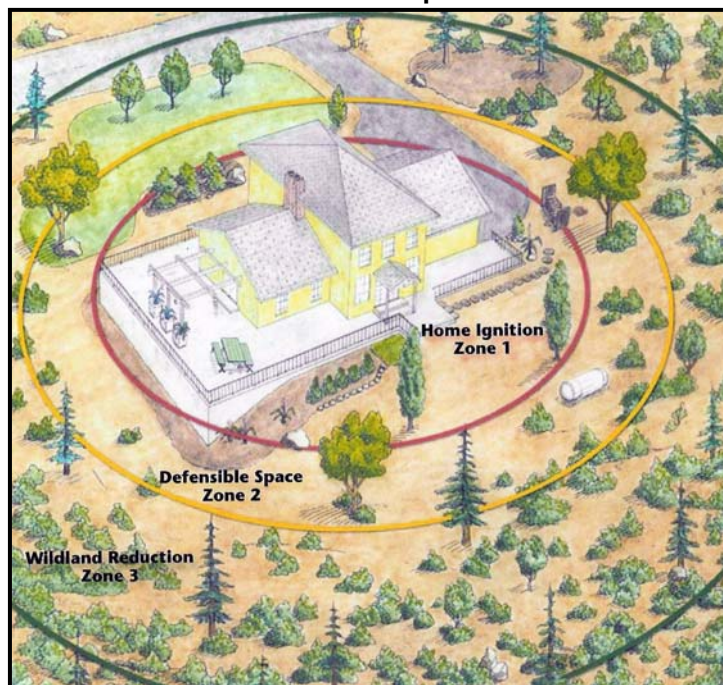

¹² A Homeowner's Guide to Fire Safe Landscaping(2005) www.FireSafeCouncil.org

RECOMMENDATIONS

- **Priority level-High.** Conduct/re-conduct (if the analysis is more than 5 years old) a parcel-level wildfire hazard analysis for the homes in the communities within the study area that have been rated very high and high. Completing this process will facilitate the following important fire management practices:
 - Establishing a baseline hazard assessment for homes in these communities
 - Education of the community through the presentation of the parcel level Hazard-Risk Analysis at neighborhood public meetings
 - Identification of defensible space needs and other effective mitigation techniques
 - Identification and facilitation of “cross-boundary” projects
 - Community achievement of national FIREWISE status
 - Development of a Pre-Attack/Operational Plan for the FMU, and eventually the entire study area. A pre-attack plan assists fire agencies in developing strategies and tactics that will mitigate incidents that occur
- **Priority level-High.** Ensure that reflective address signs are present. Some homes will need signs at both the home and driveway. (See **Appendix D** for recommendations).
- **Priority level-High.** Use the structure triage methodology provided in **Appendix C** to identify homes not likely to be defensible.
- **Priority level-High.** Improve access streets and turnarounds to create safe access for firefighting resources. This is of significant importance within the Kohler Area, Upper University/Boulder Canyon Area, and Dakota Ridge Area communities. See *Access and Addressing* (**Appendix D**).

FIGURE 21. City of Boulder Hazard Ratings by Community


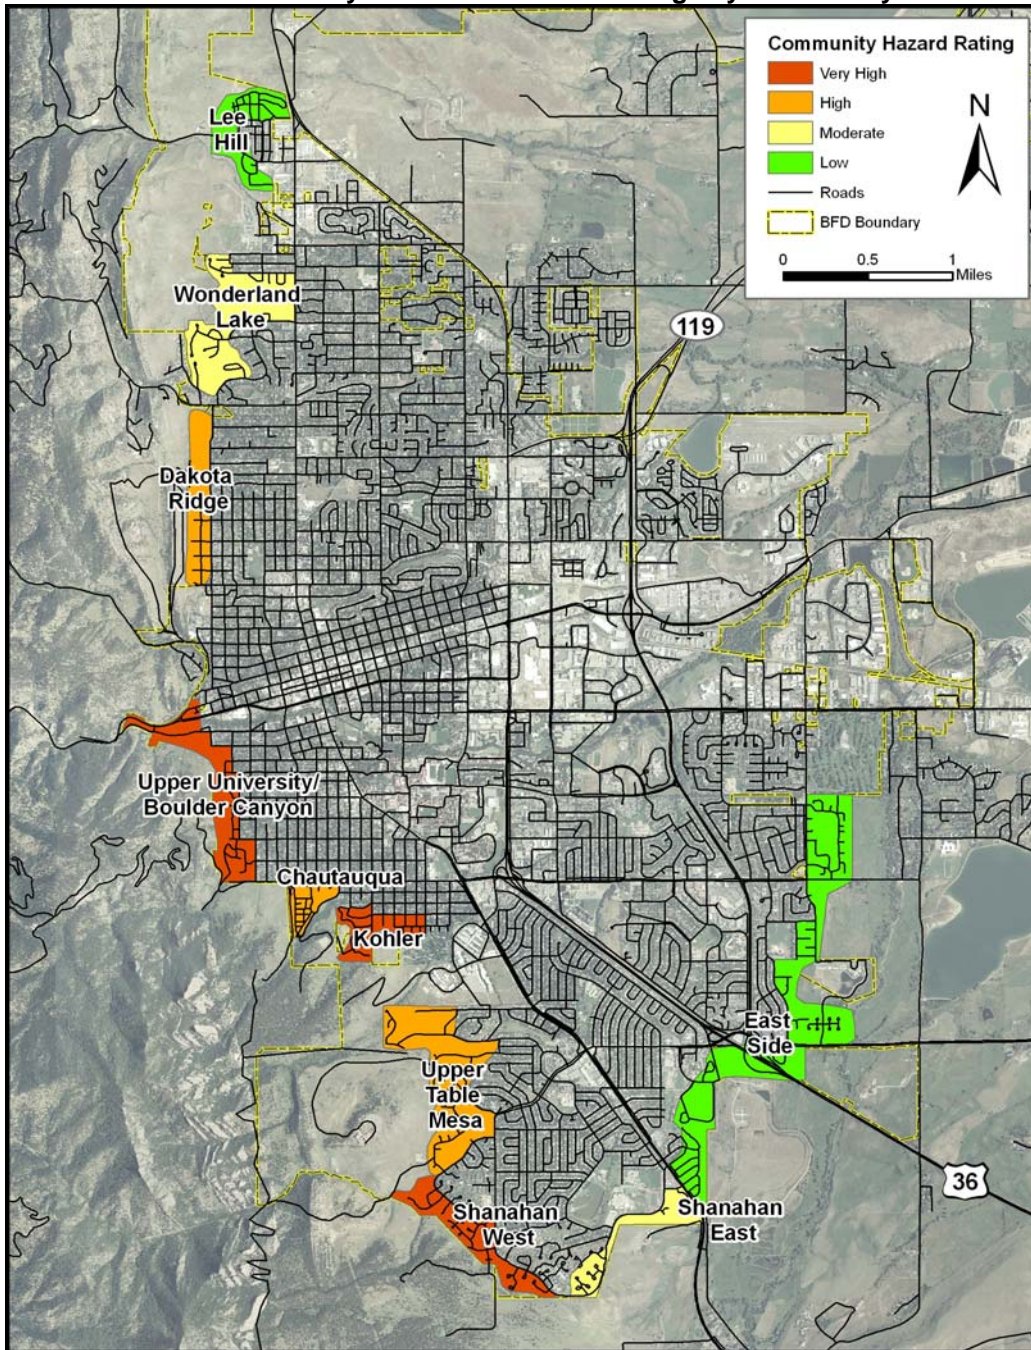


Table 4. City of Boulder Hazard Ratings by Community

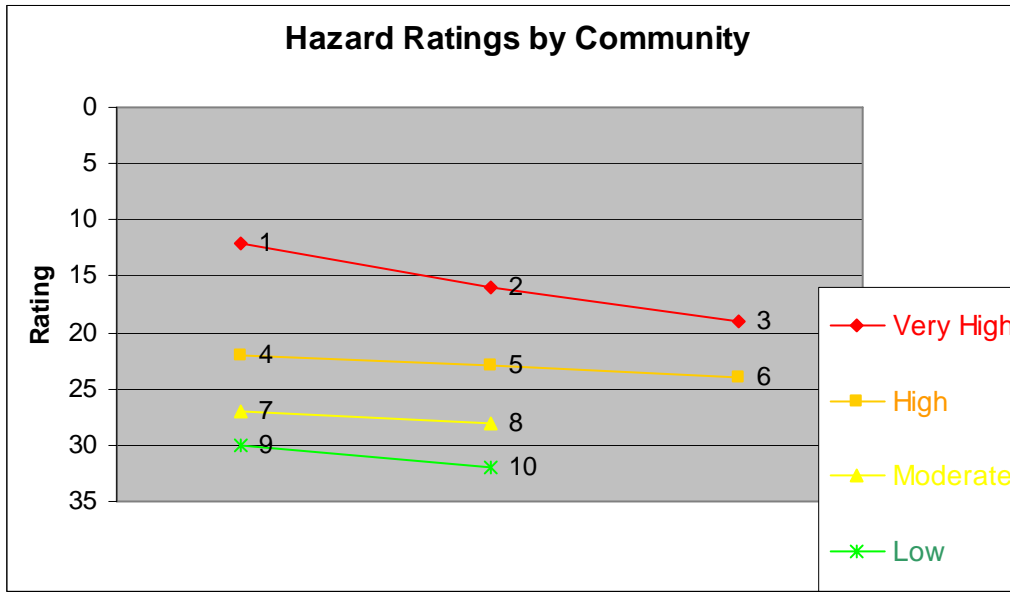

1. Kohler Area	6. Dakota Ridge Area
2. Upper University / Bldr. Canyon Area	7. Wonderland Lake Area
3. Shanahan West Area	8. Shanahan East Area
4. Chautauqua	9. East Side Area
5. Upper Table Mesa Area	10. Lee Hill Area

Plains Communities FMU

There are some communities in the study area that are not representative of a true Wildland-Urban Interface, but are adjacent to, or in close proximity to, significant wildland fuel beds. These fuel beds consist of primarily tall grass prairie remnants and short grasses. Shrubs and hardwoods are also found growing in stringers and patches in drainages and riparian areas. There are some areas with jackpots of heavier fuels, most of which are smaller than the minimum mapping unit of the fire behavior model. Most of these fuels are located on open space parcels, and while some are grazed on a rotating basis, they represent a potential threat to some or most of the homes in these communities, especially those directly adjacent to them.

These communities generally have low to flat topography, but ravines and short run slopes exist in some areas. Agricultural properties and larger rural lots are mixed in with suburban style subdivisions throughout this area. Construction type and structure age varies widely with both ignition resistant-construction and homes with flammable roofs and sidings often existing in the same neighborhood. Although these communities have been given a low hazard rating, there are general mitigation measures which should be considered to reduce the possibility of loss resulting from fires occurring in the neighboring natural fuels. Homes located on the perimeter of these communities, or otherwise adjacent to continuous areas of natural fuels, are the highest priority for mitigation. The following recommendations should be considered for the East Side Area community.

RECOMMENDATIONS

- Defensible space is recommended for all homes. Maintain defensible space throughout the year.
 - ✓ Mow grass and weeds to a low height.
 - ✓ Clean needle litter from roofs and gutters and away from foundations.
 - ✓ Do not dispose of yard waste into open space areas.
 - ✓ Discourage the planting of flammable vegetation such as juniper within 30 feet of homes.
 - ✓ Encourage the use of xeriscaping, and use fire- and drought-tolerant plants for ornamental plantings, especially within 30 feet of homes (see **Home Mitigation FMU**).
 - ✓ Water ornamental vegetation during times of drought.
 - ✓ When possible, maintain an irrigated green belt around the home.
- Extended defensible space is recommended for all homes located on the perimeter of native fuel beds, especially those located near ravines, steep slopes, or other dangerous topographic features. These areas are also noted in **Appendix B**
- Wood shake and other flammable roofing types should be replaced with ignition-resistant roofing such as asphalt or metal (see the **Home Mitigation FMU** section of this report).
- Encourage the use of low-combustibility materials for decks and projections on new construction and renovations, especially where homes are upslope from heavy fuels.
- Do not store combustibles or firewood under decks. Open areas below decks, outdoor stairways, and homes should be enclosed or screened to prevent the ingress of embers,

especially where such openings are located on slopes above natural (non-irrigated, non-maintained) vegetation.

- Trees along driveways should be limbed and thinned as necessary to maintain clearance for emergency vehicle access (13' 6" vertically and 16' horizontally).
- Power pole bases should be surrounded by an area at least 5' in diameter that is completely free of flammable vegetation.

FUELS MODIFICATION PROJECTS FMU

Introduction

One of the most effective forms of landscape-scale fuels modification is the fuelbreak (sometimes referred to as “shaded fuelbreak”). A fuelbreak is an easily accessible strip of land of varying width (depending on fuel and terrain) in which fuel density is reduced, thus improving fire control opportunities. Vegetation is thinned, removing diseased, fire-weakened, and most standing dead trees. Thinning should select for the more fire-resistant species. Ladder fuels, such as low limbs and heavy regeneration, are removed from the remaining stand. Brush, dead and down materials, logging slash, and other heavy ground fuels are removed and disposed of to create an open park-like appearance. The use of fuelbreaks under normal burning conditions can limit the uncontrolled spread of fires and aid firefighters in slowing the spread rate. Under extreme burning conditions, where spotting occurs for miles ahead of the main fire, and probability of ignition is high, even the best fuelbreaks are not effective. Nonetheless, fuelbreaks have proven to be effective in limiting the spread of crown fires in Colorado.¹³ Factors to be considered when determining the need for fuelbreaks in mountain subdivisions include:

- The presence and density of hazardous fuels
- Slope
- Other hazardous topographic features
- Crowning potential
- Ignition sources

With the exception of Aspen, all of Colorado’s major timber types represent a significant risk of wildfire. Increasing slope causes fires to move from the surface fuels to crowns more easily, due to preheating. A slope of 30% causes the fire-spread rate to double when compared to the fire-spread rate (with the same fuels and conditions) on flat ground. Chimneys, saddles, and deep ravines are all known to accelerate fire spread and influence intensity. Communities with homes located on or above such features, as well as homes located on summits and ridge tops, are good candidates for fuel breaks. Crown fire activity values for City of Boulder were generated by the FlamMap model and classified into four standard ranges. In areas where independent and dependent crown fire activity is likely to exist, fuelbreaks should be considered. If there are known likely ignition sources (such as railroads and recreation areas that allow campfires) present in areas where there is a threat of fire being channeled into communities, fuelbreaks should be considered.

Fuelbreaks should always be connected to a good anchor point, like a rock outcropping, river, lake, or road. The classic location for fuelbreaks is along the tops of ridges, in order to stop fires from backing down the other side or spotting into the next drainage. This is not always practical from a WUI standpoint, because the structures firefighters are trying to protect are usually located at the tops of ridges or mid-slope. Mid-slope positioning is considered the least desirable for fuelbreaks, but it may be easiest to achieve as an extension of defensible space work or off existing roads and escape routes. One tactic would be to create fuelbreaks on slopes below homes located mid-slope and on ridge tops, so that the area of continuous fuels between the defensible space of homes and the fuelbreak is less than ten acres. Another common tactic is to position fuelbreaks along the bottom of slopes. It would make sense to locate fuelbreaks mid-slope below homes to break the continuity of fuels into the smaller units

13 Frank C. Dennis, “Fuelbreak Guidelines for Forested Subdivisions” (Colorado State Forest Service, Colorado State University, 1983), p. 3.

mentioned above, even though this position is considered the least desirable from a fire suppression point of view.

Fuelbreaks are often easiest to construct along existing roadbeds (see the description of the fuels modification project for access routes on page 42 of this report). The minimum recommended fuelbreak width is usually 200 feet. As spread rate and intensity increases with slope angle, the size of the fuelbreak should also be increased, with an emphasis on the downhill side of the roadbed or centerline employed. The formulas for slope angles of 30% and greater are as follows: below road distance = $100' + (1.5 \times \text{slope } \%)$, above road distance = $100' - \text{slope } \%$ (see **Table 4**). Fuelbreaks that pass through hazardous topographic features should have these distances increased by 50%.¹⁴ Since fuelbreaks can have an undesirable effect on the aesthetics of the area, crown separation should be emphasized over stand density levels. In other words, isolating groupings rather than cutting for precise stem spacing will help to mitigate the visual impact of the fuelbreak.

In Colorado's dry climate, slash decomposes very slowly. One consequence of failing to remove slash is to add to the surface fuel loading, potentially making the area more hazardous than before treatment. It is imperative to dispose of all materials by piling and burning, chipping, physical removal from the area, or lopping and scattering. Of these methods, lopping and scattering is the cheapest, but also the least effective, since it adds to the surface fuel load.

Fuelbreaks must be maintained to be effective. Thinning usually accelerates the process of regenerative growth. The effectiveness of the fuelbreak may be lost in as little as three to four years if ladder fuels and regeneration are not controlled.

Securing the cooperation and participation of landowners is typically one of the most difficult issues in establishing and maintaining fuelbreaks. Ownership maps of the area indicate that implementation of fuels reduction projects recommended here would require the approval of public land management agencies as well as private landowners.

¹⁴ Frank C. Dennis, "Fuelbreak Guidelines for Forested Subdivisions" (Colorado State Forest Service, Colorado State University, 1983), p. 11.

ACCESS ROUTE FUELS MODIFICATION RECOMMENDATIONS

Road side thinning should include an area of at least 100' on either side of the centerline of the route, where practical. This distance should be modified to account for increased slope and other topographic features that increase fire intensity (see **Table 5**). This is especially important in communities with steep, narrow roads and few turnouts. In these areas, safer access for firefighters would make an impact on the number of structures that could be defended in a wildfire. Existing and natural barriers to fire should be incorporated into the project dimensions.

The cooperation of adjacent, contiguous landowners should be secured. If this is not possible, more intensive thinning may need to occur within the road easement. Landowner participation allows the project to be more flexible in selecting trees for removal. It allows greater consideration for the elements of visual screening and aesthetics. Enlarging the project dimensions allows more options for tree selection, while still protecting the access/egress corridor.

Elements of the fuels modification space for access and egress routes should include:

- Tree crown separation of at least 10' with groups of trees and shrubs interspersed as desired.
- Tree crown separation greater than 10' may be required to isolate adjacent groups or clumps of trees.
- Limb all remaining trees to a height of 8' or 1/3 of the tree height (whichever is greater).
- Clean up ground fuel within the project area.

TABLE 5. Recommended Treatment Distances For Mid-Slope Roads

% Slope	Distance Above Road	Distance Below Road
30	70 feet	145 feet
35	65 feet	153 feet
40	60 feet	160 feet
45	55 feet	168 feet
50	50 feet	175 feet


Current and Proposed Cross-Boundary Projects

A very important purpose of this CWPP is to make known fuel reduction projects which may affect the City of Boulder interface areas. Below are descriptions of proposed projects contained in bordering agencies CWPP's. **Figure 21** shows some other known projects. Their last known status is in question, and as always, thorough "ground truthing" should be undertaken before planning begins on future projects. Where cross boundary projects exist, the City of Boulder should combine efforts with other agencies, so projects may be completed in a timely manner. This will ultimately serve to protect communities within the City of Boulder.

- **Kneale Road to Bison Drive via the "Gas Line Road."** This RMF draft CWPP project focuses on opening up the Gas Line Road for emergency usage from Kneale Road where it leaves the South Boulder Creek northward along the Gas Line Road to the Ethel Harrold Trailhead via Martin Gulch. This emergency usage would be for both citizens and emergency responders. The road surface should be evaluated to determine the feasibility of allowing non-four wheel drive vehicles in and out of the area. Road pullouts will also need to be constructed. This project will require a cooperative effort between RMF and Boulder County Open Space.
- **Chapman Drive to Boulder Canyon Drive.** This RMF draft CWPP project is meant to enhance fire access to the area between Flagstaff Road and Boulder Canyon via Chapman Drive. It is recommended that the road surface be improved and the adjacent fuels brushed back, to allow larger all-wheel drive fire apparatus. This should be a joint effort between the City of Boulder, Rocky Mountain Fire, and the Four Mile Fire District so that the project may be implemented and completed in a timely manner.
- **The Boulder Rural FPD CWPP.**
 - **Spring Valley Subdivision.** Individual home defensible space was recommended.
 - **Seven Hills Subdivision.** A number of projects tie into the OSMP Anemone Hill project.
 - **Knollwood Fuelbreak.** A fuelbreak project runs along the western edge of the Knollwood subdivision from Sunshine Canyon Drive to Pearl Street.
- **Flagstaff Road treatment.** As of this writing, this project is being implemented by OSMP. The project will have a direct effect on access to and from the upper Flagstaff area. A continuation of this project has been suggested within the draft Rocky Mountain Fire CWPP.

Note: Numerous fuel reduction projects exist within the City of Boulder Forest Ecosystem Management Plan written in June of 1999. It is suggested that these be referenced, updated, and implemented. As mentioned above a number of City projects will benefit multiple agencies.


FIGURE 22. Current and Proposed Projects near City of Boulder

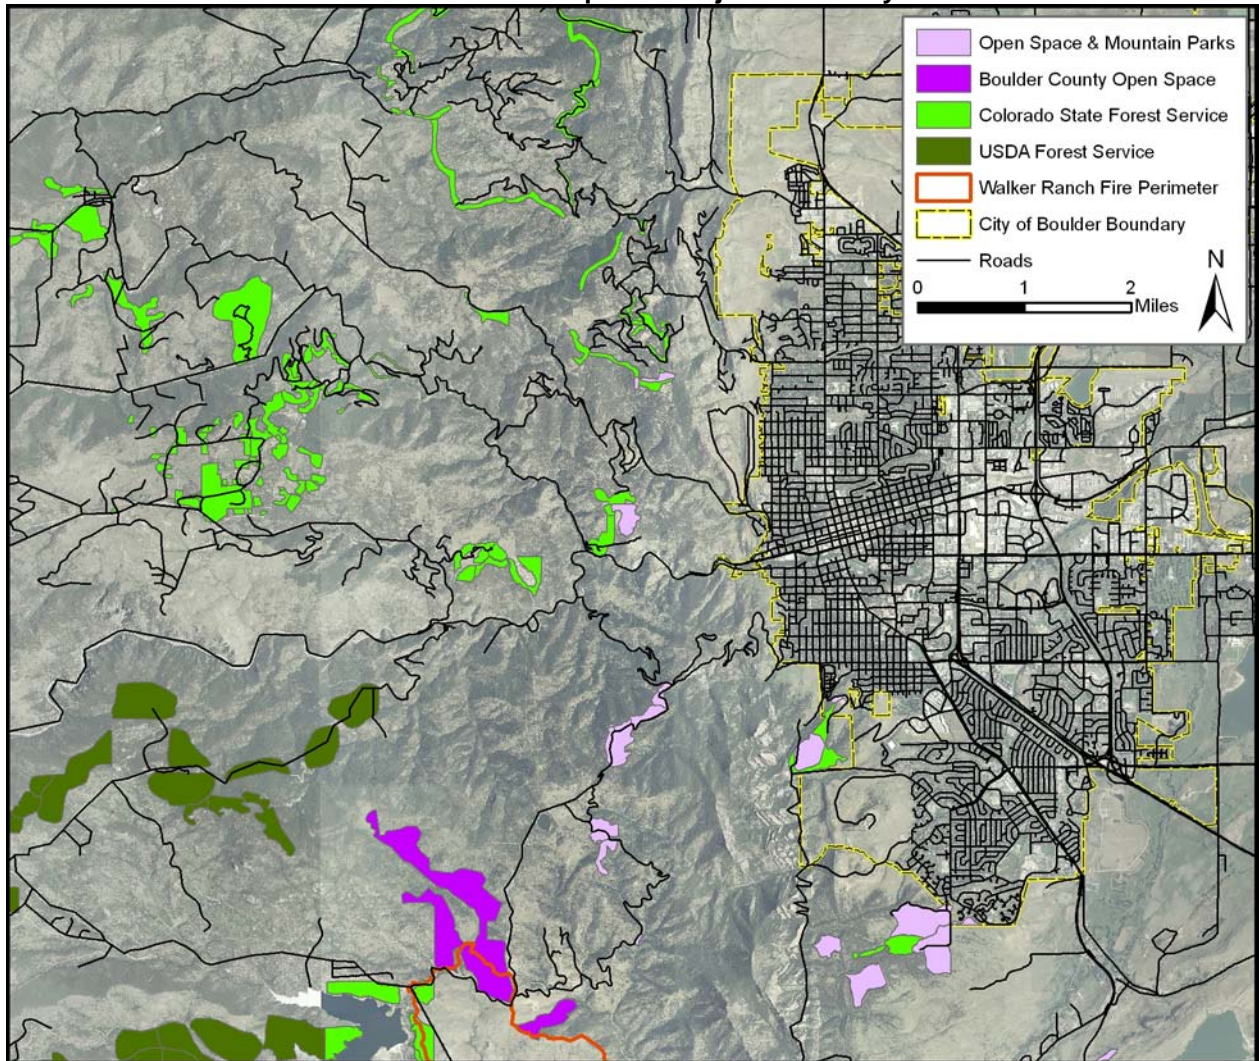

Proposed Fuels Reduction Projects for the City of Boulder

The following recommendations are in addition to, not in place of, the fuels reductions mentioned in the **Safety Zones, Addressing, Access, and Evacuation Routes FMUs**. Please note that the boundaries shown on the maps in this document are only approximate. Exact boundaries will be determined when treatment agreements are negotiated with the involved land owners and/or land managers.

FIGURE 23. Proposed Fuel Reduction Projects

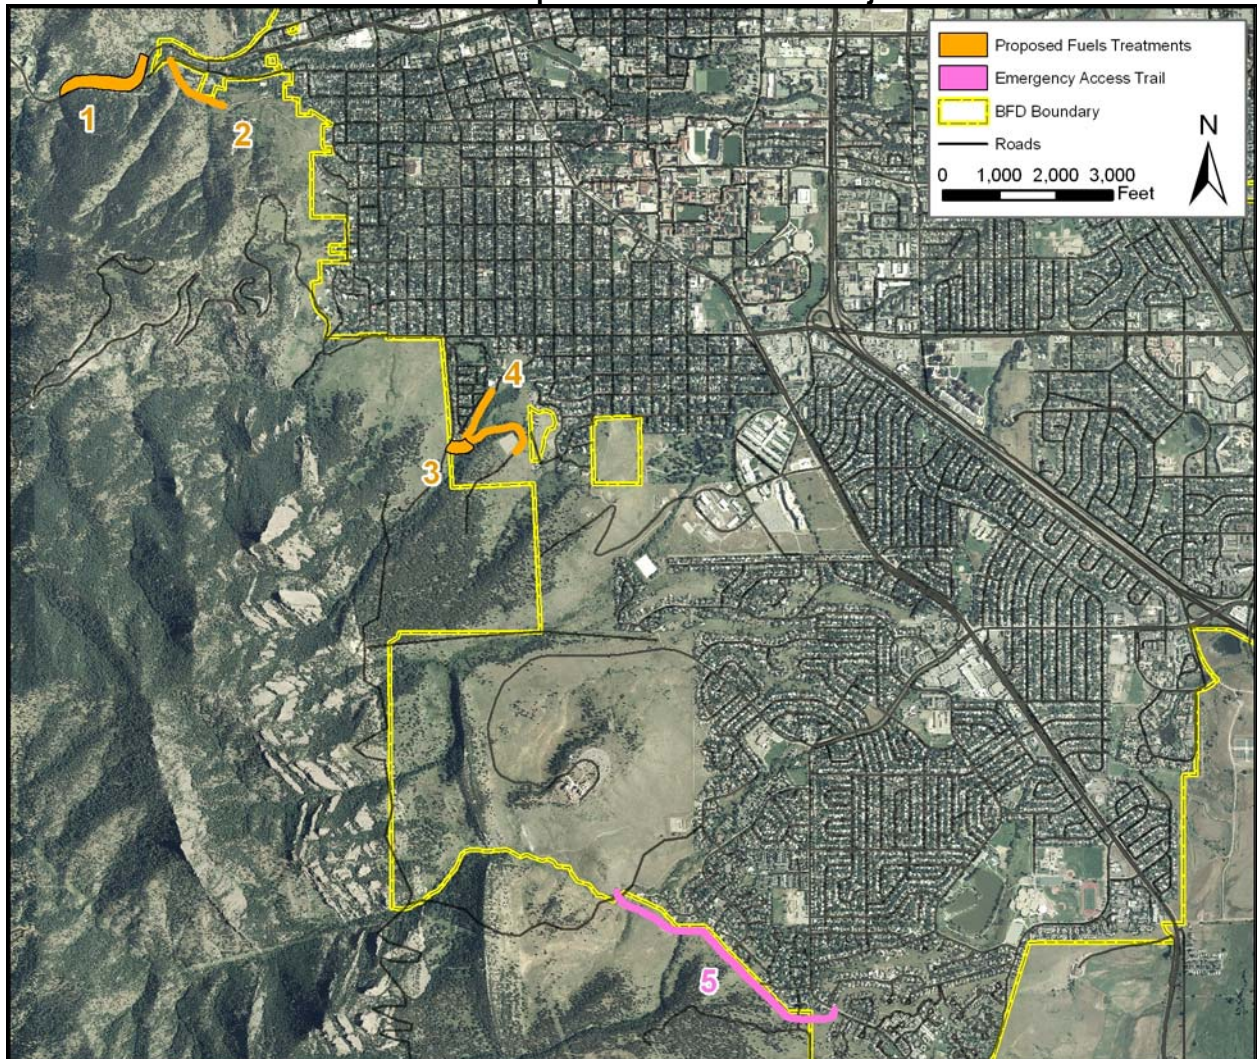

1. Canon Park Fuelbreak
2. Arapahoe Avenue Fuelbreak
3. Upper Chautauqua Fuelbreak
4. Chautauqua Reservoir Road Treatment
5. Lehigh Street to Bear Creek Emergency Access Trail Treatment

RECOMMENDATIONS:

- 1. Chautauqua Reservoir Road Treatment. Priority level – High (see Figure 22).** This project focuses on limbing and thinning along the Chautauqua Reservoir Road from the access gate up to the reservoir. Thinning should be conducted to conform to the shaded fuelbreak guidelines described in the “Access Route Fuels Modification Recommendations” section. Extra depth should be considered below the road in the drainage (200 feet). This project will help to protect the homes on Goldenrod Drive and the homes between the reservoir and Bellevue Drive (Chautauqua rated as high hazard and Kohler Area rated as very high hazard). This project will be re-enforced by the OSMP fuel reduction projects that have been completed or are slated for completion.
- 2. Upper Chautauqua Fuel Break. Priority Level – High (see Figure 22).** This project is designed to break up the fuel continuity between the Mesa Trail and the Chautauqua Reservoir Road. The boundaries of the fuelbreak should be a minimum of 25 feet in width. Thinning should be conducted so that 10-foot crown spacing is achieved. This fuel break could also serve as firefighter access. Chautauqua rated as high hazard.
- 3. Arapahoe Avenue Fuel Break. Priority Level – High (see Figure 22).** This project focuses on providing a fuelbreak between 200 and 300 Arapahoe Avenues. The project begins at the western perimeter of the Foot of the Mountain Motel and extends to the eastern perimeter of the (proposed) extended defensible of 300 Arapahoe Avenue. Thinning should be conducted to conform to the shaded fuelbreak guidelines described in the “Access Route Fuels Modification Recommendations” section. This treatment will also help to protect the Flagstaff Amphitheatre area from possible Arapahoe Avenue ignitions. The Upper University/Boulder Canyon Area rated as a very high hazard.
- 4. Canon Park Fuel Break. Priority Level – High (see Figure 22).** A fuelbreak using the Boulder Canyon aqueduct above Canon Park should be implemented. The project would use the aqueduct for the majority of the fuel break. The western section of fuel break will tie into Boulder Creek above the homes on Canon Park. The eastern section will tie into Canyon Boulevard below the structure located around 100 Canyon Boulevard. Thinning should be conducted to conform to the shaded fuelbreak guidelines described in the *Access Route Fuels Modification Recommendations* section. The Upper University/Boulder Canyon Area rated as a very high hazard.
- 5. OSMP Projects. Priority Level – High (not shown in graphic form).** Fuel reduction projects exist within the City of Boulder Forest Ecosystem Management Plan written in June of 1999. It is suggested that these be referenced, updated, and implemented.

Water Supply FMU

Within the study area, as in many of the areas of Colorado's Front Range, water is a critical fire suppression issue. The City of Boulder is serviced by an above-average hydrant network. Minor recommendations are found in **Appendix B** having to do with hydrant visibility.

Areas of Special Interest

Introduction

In addition to residential communities, certain other properties have been identified by stakeholders to be of special concern or interest. In some cases these areas are departments within the city and present special problems for firefighters. A brief description of each of these properties is presented in this section, followed by recommendations, where applicable, designed to address concerns specific to the individual property. These recommendations are in addition to, not in place of, other recommendations in this report concerning the community or area where these properties are located.

City of Boulder; Watershed (Silver Lake and Barker Reservoir)

Like most western communities, Boulder depends on stored water most of the year. High streamflows from melting snowpack occur for only a few spring and summer months. Natural streamflows in late summer and the winter are not sufficient to meet customer demands and must be supplemented with previously stored water supplies. The amount of water available also changes from year to year depending on how much snow falls in the mountains. Therefore, Boulder must store water in reservoirs during wetter years to carry over for use in dry years. The City owns seven reservoirs and several natural lakes in the headwaters of the North Boulder Creek basin within the Silver Lake Watershed. In addition, the city owns Boulder Reservoir northeast of Boulder and the Barker Reservoir facilities on Middle Boulder Creek.

There are several reservoirs and natural lakes within the city-owned Silver Lake Watershed at the headwaters of North Boulder Creek just below the continental divide. Barker Reservoir is an 11,700 acre-foot reservoir near Nederland.^[1]

A wildfire could have a very serious impact on the water quality and infrastructure of these watersheds. Immediate concerns would be erosion, sedimentation and water contamination. Long term issues would be increased run off, soil retention, water quality, and loss of snowpack from exposure. There would be a significant fiscal impact as well. For further analysis see **APPENDIX F**.

RECOMMENDATIONS

- All buildings and improvements adjacent to wildland fuels should follow the recommendations as outlined within the Homes Mitigation FMU and Plain Communities FMU and Appendix B.
- Roadways need to be cleared and maintained to allow for emergency apparatus response.

[1] Utilities Division, personal communication; referenced 08-21-07

- Proper signage should be maintained and improved for more effective emergency response.
- Inspections and maintenance should continue on all infrastructure related to the watershed.
- Thinning projects need to be considered for some of the dense canopy forests on barker reservoir and other portions of the Silver Lake watershed.
- A more in-depth study on the adverse impacts of wildfire on the watershed should be completed.

City of Boulder Open Space and Mountain Parks

Over 43,000 acres of city open space land is located in and around the city of Boulder. Some of the land is in agricultural production, while the vast majority of the lands are open to passive recreational uses, including an extensive trail system available for hikers and horseback riders. Bicyclists enjoy riding on designated trails. Picnicking and fishing areas can also be found.¹⁵ With annual visitation of 5.3 million per year, human-caused wildfire ignitions are a legitimate concern.

RECOMMENDATIONS:

- Mow grass and weeds to a low height. This should be a minimum of 5 feet from the edge of the trail along both sides.
- All buildings and improvements adjacent to wildland fuels should follow the recommendations as outlined within the Homes Mitigation FMU and Plain Communities FMU and Appendix B.
- Additional fuel reduction projects should be pursued as mentioned in the Fuel Modification Projects FMU. Completed projects will need to be maintained and inspected annually.
- The public should be provided with wildfire educational materials available at all the information kiosks located on Open Space properties.
- Fire danger signage should also be posted at the kiosks. The fire danger for the day should be displayed; this information will need to be kept current.
- The area adjacent to Kossler Lake has had fuel reduction work. This area needs to be evaluated annually and maintained.

¹⁵ http://www.bouldercolorado.gov/index.php?option=com_content&task=view&id=1167&Itemid=1082

National Center for Atmospheric Research (NCAR)

NCAR provides the university research and teaching community with tools such as aircraft and radar to observe the atmosphere and with the technology and assistance to interpret and use these observations, including supercomputer access, computer models, and user support. NCAR and university scientists work together on research topics in atmospheric chemistry, climate, cloud physics and storms, weather hazards to aviation, and interactions between the sun and earth. In all of these areas, scientists are looking closely at the role of humans in both creating climate change and responding to severe weather occurrences.¹⁶

RECOMMENDATIONS:

- Continue to implement recommendations outlined in the *UCAR Ecosystem Management Plan*, Anchor Point 2005
- All buildings and improvements (including equipment stored outside) adjacent to wildland fuels should follow the recommendations outlined in the *Homes Mitigation FMU* and **Appendix B**.
- Employees should attend a basic wildfire awareness class provided by the City of Boulder (this could be incorporated into the “all-hazard” preplan mentioned below). This will also serve to educate the employees as to the procedures to follow in the event of a wildfire.
- The City of Boulder should assist NCAR with the creation of an “all-hazard” preplan, which includes wildland fire.

NIST Boulder Laboratories

The National Institute of Standards and Technology is a federal technology agency whose mission is to promote U.S. innovation and industrial competitiveness by advancing measurement science, standards, and technology in ways that enhance economic security and improve our quality of life.

RECOMMENDATIONS:

- All buildings and improvements (including equipment stored outside) adjacent to wildland fuels should follow the recommendations outlined in the *Homes Mitigation FMU* and **Appendix B**.
- Employees should attend a basic wildfire awareness class provided by the City of Boulder (this could be incorporated into the “all-hazard” preplan mentioned below). This will also serve to educate the employees as to the procedures to follow in the event of a wildfire.
- The City of Boulder should assist NCAR with the creation of an “all-hazard” preplan, which includes wildland fire.

¹⁶ <http://www.ncar.ucar.edu/organization/about/>; referenced 08-21-07

GLOSSARY

The following definitions apply to terms used in the City of Boulder Community Wildfire Protection Plan.

1 hour Timelag fuels: Grasses, litter and duff; <1/4 inch in diameter.

10 hour Timelag fuels: Twigs and small stems; ¼ inch to 1 inch in diameter.

100 hour Timelag fuels: Branches; 1 to 3 inches in diameter.

1000 hour Timelag fuels: Large stems and branches; >3 inches in diameter.

Active Crown Fire: A crown fire in which the entire fuel complex – all fuel strata – become involved, but the crowning phase remains dependent on heat released from the surface fuel strata for continued spread (also called a Running Crown Fire or Continuous Crown Fire).

ArcGIS 9.x: Geographic Information System (GIS) software designed to handle mapping data in a way that can be analyzed, queried, and displayed. ArcGIS is in its ninth major revision and is published by the Environmental Systems Research Institute (ESRI).

Crown Fire (Crowning): The movement of fire through the crowns of trees or shrubs, which may or may not be independent of the surface fire.

Defensible Space: An area around a structure where fuels and vegetation are modified, cleared, or reduced to slow the spread of wildfire toward or from the structure. The design and distance of the defensible space is based on fuels, topography, and the design/materials used in the construction of the structure.

Energy Release Component: An index of how hot a fire could burn. ERC is directly related to the 24-hour, potential worst case, total available energy within the flaming front at the head of a fire.

Extended Defensible Space (also known as Zone 3): A defensible space area where treatment is continued beyond the minimum boundary. This zone focuses on forest management with fuels reduction being a secondary consideration.

Fine Fuels: Fuels that are less than ¼ inch in diameter such as grass, leaves, draped pine needles, fern, tree moss, and some kinds of slash which, when dry, ignite readily and are consumed rapidly.

Fire Behavior Potential: The expected severity of a wildland fire expressed as the rate of spread, the level of crown fire activity, and flame length. Fire Behavior Potential is derived from fire behavior modeling programs using the following inputs: fuels, canopy cover, historical weather averages, elevation, slope, and aspect.

Fire Danger: Not used as a technical term in this document due to various and nebulous meanings that have been historically applied.

Fire Hazard: Given an ignition, the likelihood and severity of Fire Outcomes (Fire Effects) that result in damage to people, property, and/or the environment. Fire Hazard is derived from the Community Assessment and the Fire Behavior Potential.

Fire Mitigation: Any action designed to decrease the likelihood of an ignition, reduce Fire Behavior Potential, or to protect property from the impact of undesirable Fire Outcomes.

Fire Outcomes (aka Fire Effects): A description of the expected effects of a wildfire on people, property, and/or the environment based on the Fire Behavior Potential and physical presence of Values at Risk. Outcomes can be desirable as well as undesirable.

Fire Risk: The probability that an ignition will occur in an area with potential for damaging effects to people, property, and/or the environment. Risk is based primarily on historical ignitions data.

Flagged Addressing: A term describing the placement of multiple addresses on a single sign, servicing multiple structures located on a common access.

FlamMap: A software package created by the Joint Fire Sciences Program, Rocky Mountain Research Station. The software uses mapped environmental data such as Elevation, Aspect, Slope, and Fuel Model, along with fuel moisture and wind information, to generate predicted fire behavior characteristics such as Flame Length, Crown Fire Activity, and Spread Rate.

Flame Length: The distance between the flame tip and the midpoint of the flame depth at the base of the flame (generally the ground surface) – an indicator of fire intensity.

FMU (Fire Management Unit): A method of prioritizing fire mitigation work efforts. Units can be defined by function (e.g., public education efforts) or geography (e.g., fuel reduction projects in a given area).

Fuelbreak: A natural or constructed discontinuity in a fuel profile used to isolate, stop, or reduce the spread of fire. Fuelbreaks may also make retardant lines more effective and serve as control lines for fire suppression actions. Fuel breaks in the WUI are designed to limit the spread and intensity of crown fire activity.

ICP (Incident Command Post): The base camp and command center from which fire suppression operations are directed.

ISO (Insurance Standards Office): A leading source of risk information to insurance companies. ISO provides fire risk information in the form of ratings used by insurance companies to price fire insurance products to property owners.

Jackpot Fuels: a large concentration of discontinuous fuels in a given area such as a slash pile.

Passive Crown Fire: a crown fire in which individual or small groups of trees torch out (candle), but solid flaming in the canopy fuels cannot be maintained except for short periods.

Slash: Debris left after logging, pruning, thinning, or brush cutting; includes logs, chips, bark, branches, stumps, and broken understory trees or brush.

Spotting: Behavior of a fire producing sparks or embers that are carried by the wind and start new fires beyond the zone of direct ignition by the main fire.

Structural Triage: The process of identifying, sorting, and committing resources to a specific structure.

Surface Fire: A fire that burns on the surface litter, debris, and small vegetation on the ground.

Timelag: Time needed under specified conditions for a fuel particle to lose 63 percent of the difference between its initial moisture content and its equilibrium moisture content.

Values at Risk: People, property, ecological elements, and other human and intrinsic values within the project area. Values at Risk are identified by inhabitants as important to the way of life of the study area and are specifically susceptible to damage from undesirable fire outcomes.

WHR (Community Wildfire Hazard Rating. AKA Community Assessment): A fifty-point scale analysis designed to identify factors which increase the potential for and/or severity of undesirable fire outcomes in WUI communities.

WUI (Wildland Urban Interface): The line, area, or zone where structures and other human development meet or intermingle with undeveloped wildland or vegetative fuels. Sometimes referred to as Urban Wildland Interface, or UWI.